

**FEATURES**

- ▶ 2"x 1"x 0.4" Metal Package
- ▶ Ultra-wide 4:1 Input Range
- ▶ High Efficiency up to 86%
- ▶ Operating Temp. Range -40°C to +80°C
- ▶ Short Circuit Protection
- ▶ I/O-isolation 1500VDC
- ▶ Input Filter meets EN 55022,class A and FCC, level A (Option)
- ▶ Remote On/Off (Option)
- ▶ 3 Years Product Warranty



**PRODUCT OVERVIEW**

The MKW2600 series is a range of isolated 15W DC/DC converter modules featuring fully regulated output voltages and ultra-wide 4:1 input voltage ranges. The product comes in a 2"x 1"x 0.4" metal package with industry standard pinout. An excellent efficiency allows an operating temperature range of -40°C to +80°C. They feature as option input filter to meet EN 55022,class A and remote On/Off . Typical applications for these converters are battery operated equipment and instrumentation, distributed power systems, data communication and general industrial electronics.

**Model Selection Guide**

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA(typ.)	Max. capacitive Load µF	Efficiency (typ.) @Max. Load %
			Max.	Min.	@Max. Load	@No Load			
			mA	mA	mA(typ.)	mA(typ.)			
MKW2621	24 (9 ~ 36)	3.3	3000	300	528	25	40	470	78
MKW2622		5	3000	300	762				82
MKW2629		5.1	3000	300	787				81
MKW2623		12	1250	125	726				85
MKW2624		15	1000	100	726				86
MKW2625		±5	±1500	±150	771				81
MKW2626		±12	±625	±62.5	726				85
MKW2627		±15	±500	±50	726				86
MKW2631	48 (18 ~ 75)	3.3	3000	300	264	15	30	470	78
MKW2632		5	3000	300	381				82
MKW2639		5.1	3000	300	393				81
MKW2633		12	1250	125	363				85
MKW2634		15	1000	100	363				86
MKW2635		±5	±1500	±150	386				81
MKW2636		±12	±625	±62.5	363				85
MKW2637		±15	±500	±50	363				86

# For each output

**Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	8	8.5	9	
	48V Input Models	15	17	18	
Under Voltage Shutdown	24V Input Models	7	8	8.5	
	48V Input Models	13	15	17	
Reverse Polarity Input Current	All Models	---	---	1	A
Short Circuit Input Power		---	---	3500	mW
Internal Power Dissipation		---	---	5000	mW
Conducted EMI (with suffix A only)		Compliance to EN 55022,class A and FCC part 15,class A			




Output Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy	At 50% Load and Nominal Vin	---	---	±2.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.1	±0.5	%
Load Regulation	Io=10% to 100%	---	±0.5	±1.0	%
Ripple & Noise	max. 20MHz Bandwidth	---	55	80	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change	---	300	500	μsec
Transient Response Deviation		---	±2	±4	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Load Protection	Foldback	120	150	---	%
Short Circuit Protection		Continuous			

General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	1200	1500	pF
Switching Frequency		290	330	400	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	700,000	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1(CB-scheme)				

Input Fuse	
24V Input Models	48V Input Models
2500mA Slow-Blow Type	1250mA Slow-Blow Type

Remote On/Off Control					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On		2.5V ~ 5.5V or Open Circuit			
Converter Off		-0.7V ~ 0.8V or Short Circuit			
Control Input Current (on)	Vctrl = 5.0V	---	---	50	μA
Control Input Current (off)	Vctrl = 0V	---	---	-1	mA
Control Common		Referenced to Negative Input			
Standby Input Current	Nominal Vin	---	---	10	mA

Environmental Specifications					
Parameter	Conditions	Min.	Max.	Unit	
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+80	°C	
Case Temperature		---	+100	°C	
Storage Temperature Range		-50	+125	°C	
Humidity (non condensing)		---	95	% rel. H	
Cooling		Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C	

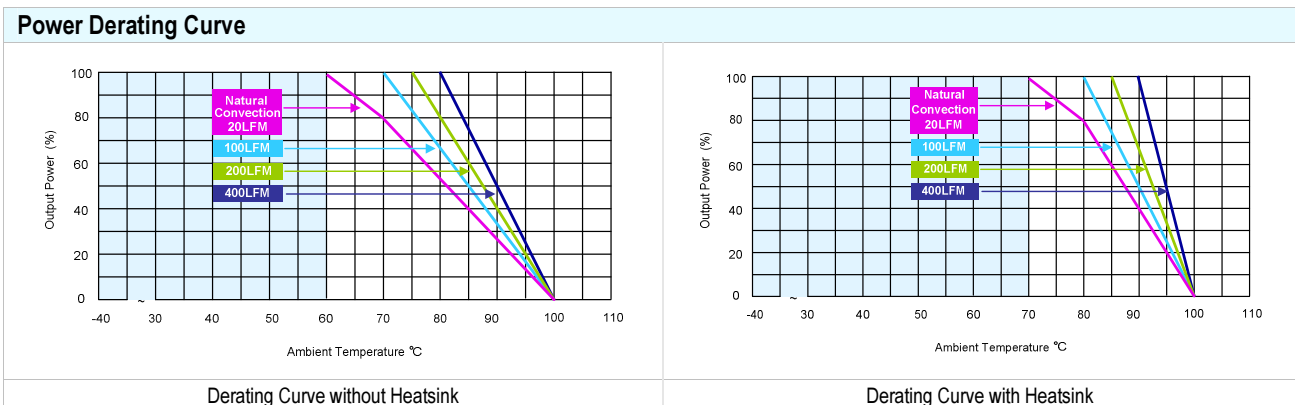




**Test Setup**



**Input Reflected-Ripple Current Test Setup**

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 KHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

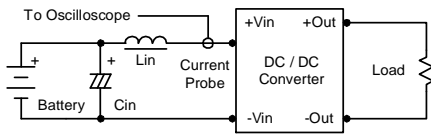

**Peak-to-Peak Output Noise Measurement Test**

Use a  $C_{out}$  0.47 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

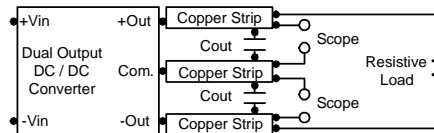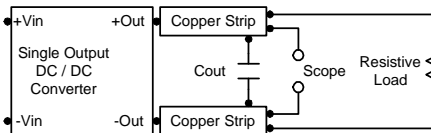

**Technical Notes**

**Remote On/Off**


Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is -0.7V to 0.8V. A logic high is 2.5V to 5.5V. The maximum sink current at on/off terminal during a logic low is -1 mA. The maximum allowable leakage current of the switch at on/off terminal (2.5 to 5.5V) is 50 $\mu$ A.

**Overcurrent Protection**

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.



**Input Source Impedance**

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 KHz) capacitor of a 22 $\mu$ F for the 12V input devices and a 6.8 $\mu$ F for the 24V and 48V devices.

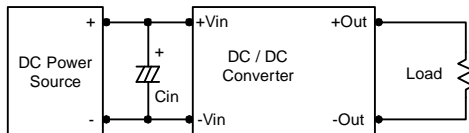

**Output Ripple Reduction**

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 $\mu$ F capacitors at the output.

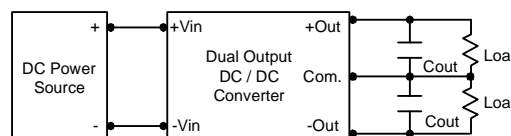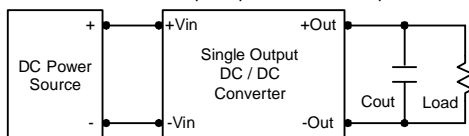

**Maximum Capacitive Load**

The MKW2600 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 220 $\mu$ F maximum capacitive load for dual outputs and 470 $\mu$ F capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

**Thermal Considerations**

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

