

FEATURES

- ◆ RoHS compliant
- ◆ Efficiency up to 86%
- ◆ SIP8 Package
- ◆ Wide temperature performance at full 2 Watt load, -40°C to 85°C
- ◆ UL 94V-0 package material
- ◆ No heat sink required
- ◆ Low ripple and good EMC Features
- ◆ Industry standard pin out
- ◆ Power sharing on output
- ◆ I/O Isolation 1500VDC
- ◆ Short Circuit Protection (automatic recovery)
- ◆ Internal SMD construction
- ◆ External On/Off control
- ◆ 2:1 wide input voltage range

MODEL SELECTION

WRA^①05^②05^③Y^④S^⑤-2W^⑥

- ① Product Series ② Input Voltage
 ③ Output Voltage ④ Wide (2:1) Input Range
 ⑤ SIP8 Package Style ⑥ Rated Power

DESCRIPTION

The WRA_YS-2W & WRB_YS-2W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) where the voltage of the input power supply is wide range (voltage ranges ≤ 2:1);
- 2) where isolation is necessary between input and output (isolation voltage ≤ 1500VDC);
- 3) where the regulation of the output voltage and the output ripple noise are demanded.



SELECTION GUIDE

order code	Input			Output			Efficiency (% Typ)
	Voltage (VDC)			Current (mA)		Voltage (VDC)	
	Nominal	Range	Max*	Max	Min		
WRA0505YS-2W	5	4.5-9.0	11	±200	±20	±5	67
WRA0512YS-2W	5	4.5-9.0	11	±83	±8	±12	72
WRA0515YS-2W	5	4.5-9.0	11	±67	±7	±15	73
WRB0505YS-2W	5	4.5-9.0	11	400	40	5	67
WRB0509YS-2W	5	4.5-9.0	11	222	22	9	72
WRB0512YS-2W	5	4.5-9.0	11	167	16	12	73
WRB0515YS-2W	5	4.5-9.0	11	133	13	15	72
WRA1205YS-2W	12	9.0-18.0	22	±200	±20	±5	73
WRA1209YS-2W	12	9.0-18.0	22	±111	±11	±09	78
WRA1212YS-2W	12	9.0-18.0	22	±83	±8	±12	78
WRA1215YS-2W	12	9.0-18.0	22	±67	±7	±15	77
WRB1205YS-2W	12	9.0-18.0	22	400	40	5	75
WRB1209YS-2W	12	9.0-18.0	22	222	22	9	77
WRB1212YS-2W	12	9.0-18.0	22	167	16	12	79
WRB1215YS-2W	12	9.0-18.0	22	133	13	15	80
WRA2405YS-2W	24	18.0-36.0	40	±200	±20	±5	76
WRA2412YS-2W	24	18.0-36.0	40	±83	±8	±12	79
WRA2415YS-2W	24	18.0-36.0	40	±67	±7	±15	78
WRB2403YS-500	24	18.0-36.0	40	500	50	3.3	67
WRB2403YS-2W	24	18.0-36.0	40	500	50	3.3	67
WRB2405YS-2W	24	18.0-36.0	40	400	40	5	77
WRB2409YS-2W	24	18.0-36.0	40	222	22	9	79
WRB2412YS-2W	24	18.0-36.0	40	167	16	12	80
WRB2415YS-2W	24	18.0-36.0	40	133	13	15	80
WRA4805YS-2W	48	36.0-72.0	80	±200	±20	±5	75
WRA4812YS-2W	48	36.0-72.0	80	±83	±8	±12	79
WRA4815YS-2W	48	36.0-72.0	80	±67	±7	±15	79
WRB4805YS-2W	48	36.0-72.0	80	400	40	5	75
WRB4809YS-2W	48	36.0-72.0	80	222	22	9	76
WRB4812YS-2W	48	36.0-72.0	80	167	16	12	78
WRB4815YS-2W	48	36.0-72.0	80	133	13	15	78

*Input voltage can't exceed this value, or will cause the permanent damage.

OUTPUT SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Output power	Refer to product program	0.2		2	W
Line regulation	Input voltage from low to high		±0.2	±0.5	%
Load regulation	10% to 100% full load (WRB_YS-2W)		±0.5	±0.7	%
	10% to 100% full load (WRA_YS-2W)*		±0.5	±1.0	%
Output voltage accuracy	Refer to recommended circuit		±1	±3.0	%
Temperature drift (Vout)	Refer to recommended circuit			±0.0	%/°C
Output Ripple**	20MHz Bandwidth		25	75	MV p-p
Output Noise**	20MHz Bandwidth		25	75	MV p-p
Switching frequency	100% Full load, input voltage range		300		Khz

* Dual output models unbalanced load (25/100%): ±5% Max

** Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
NO-load power consumption			120		°C
Operating temperature		-40		85	°C
Storage temperature		-55		125	°C
Lead temperature	1.5mm from case for 10 seconds			300	°C
Temp.rise at full load			15	35	°C
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
Short circuit protection*		Continuous,automatic recovery			
MTBF		1000		1	S
Weight			5		g

*Supply voltage must be discontinued at the end of short circuit duration.

TYPICAL CHARACTERISTICS

Temperature Derating Graph

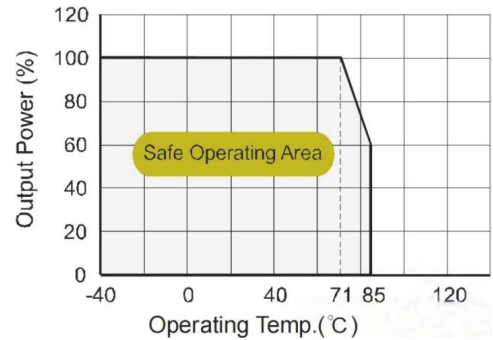

ISOLATION SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 minute and 1mA max	1500			VDC
Isolation resistance	Test at Viso=500VDC	1000			MΩ
Isolation capacitance	100KHz, 1v		35		pF

APPLICATION NOTE

SIZE Graph

1) Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1). However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1). General:

Cin: 5V,12V 100uF
24V,48V 10uF
Cout: 100uF(typ.)
Lin: 4.7PH ~120PH
Lout:2.2PH ~10PH
Cs: 10uF ~ 22uF

2) CTRL Terminal

When open or high impedance, the converter work well; When this pin is "high"; the converter shutdown; It should be note that the input current (Ic) should between 5-10mA, exceeding the maximum 20mA will cause permanence damage to the converter. The value of R Can be derived as follows:

$$R = \frac{V_C - V_D - 1.0}{I_c}$$

3) Input current

While using unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current Ip (Figure 2).


General: $I_p \leq 1.4 \cdot I_{in-max}$

4) No parallel connection or plug and play


RECOMMENDED CIRCUIT

OUTPUT Graph


Single Output

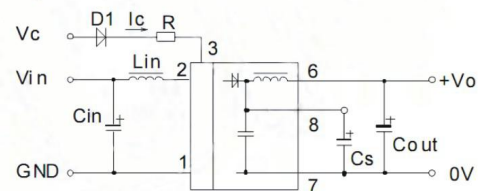

Dual Output

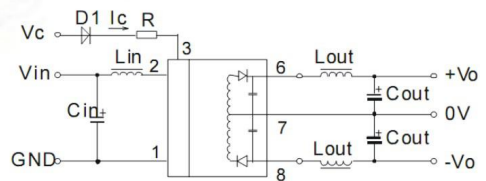

(Figure 1)

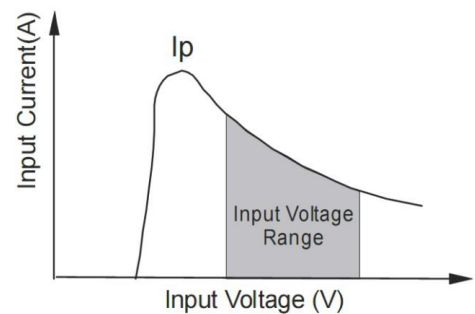


(Figure 2)

EXTERNAL CAPACITOR TABLE (TABLE 1)

Single Vout (VDC)	Cout (μF)	Dual Vout (VDC)	Cout (μF)
5	680	±5	330
9	560	±12	220
12	470	±15	150
15	330	-	-

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

MECHANICAL DIMENSIONS

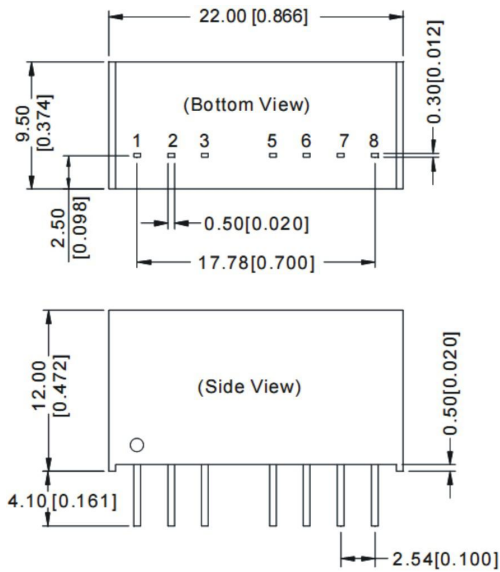


Note:
 Unit:mm[inch]
 Pin section tolerances:±0.10mm[±0.004inch]
 General tolerances:±0.25mm[±0.010inch]

FOOTPRINT DETAILS

Pin	Single	Dual
1	GND	GND
2	V _{in}	V _{in}
3	CTRL	CTRL
5	NC	NC
6	+V ₀	+V ₀
7	0V	0V
8	CS	-V ₀


NC:No connection

RECOMMENDED FOOTPRINT

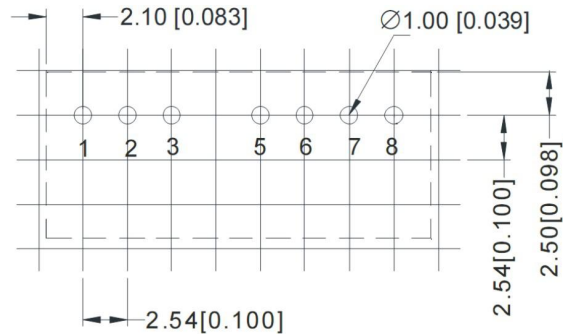

RECOMMENDED FOOTPRINT
 Top view,grid:2.54mm(0.1inch)
 diameter:1.00mm(0.039inch)

TUBE OUTLINE DIMENSIONS

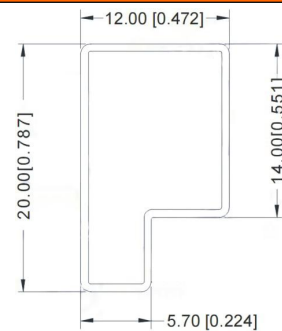

Note:
 Unit :mm[inch]
 General tolerances: ±0.50mm[±0.020inch]
 L=530mm[20.866inch] Tube Quantity: 22pcs
 L=220mm[8.661inch] Tube Quantity: 8pcs

When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power. No parallel connection or plug and play.

No parallel connection or plug and play.

Use dual output simultaneously, forbid opening output pin (0V) to use as single output.

Note:

- 1.The load shouldn't be less than 10%, otherwise ripple will increase dramatically.
- 2.Operation under 10% load will not damage the converter; However, they may not meet all specification listed.
- 3.All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- 4.In this data sheet, all the test methods of indications are based on corporate standards.
- 5.Only typical models listed, other models may be different, please contact our technical person for more details.