

# RG-1.5W Series



1.5W 2:1 Regulated Single & Dual output

## Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 75%
- -40 ~ 85°C Operating Temperature
- Plastic Case Standard, Optional Metal Case



The RG series is a family of cost effective 1.5W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5, 12, 24 and 48 with output voltage of 5, 7.2, 9, 12, 15, 18, 24,  $\pm 5$ ,  $\pm 7.2$ ,  $\pm 9$ ,  $\pm 12$ ,  $\pm 15$ ,  $\pm 18$  and  $\pm 24$  Vdc. High performance features include high efficiency operation up to 75% and output voltage accuracy of  $\pm 1\%$  maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$
Line regulation	$\pm 0.5\%$
Load regulation	$\pm 0.5\%$
Ripple & noise(20 MHz bandwidth)(1)	60mV pk-pk
Short circuit protection	Continuous
Temperature coefficient	$\pm 0.02\%/^{\circ}\text{C}$
Capacitor load(2)	See table

INPUT SPECIFICATIONS	
Voltage Range	See table
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	PI Type
Input Reflected Ripple Current(3)	35mA pk-pk

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(3 sec)	
Input/Output	1500~3500Vdc
Metal Case/Input & Output	1000Vdc
I/O Isolation Capacitance	60 pF Typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	100~400kHz
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1Mhrs
Safety Standard : (designed to meet)	IEC 60950-1

PHYSICAL SPECIFICATIONS	
Case Material	Non-conductive Black Plastic(UL94V-0 rated)
	Nickel-coated Copper
Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	$\varnothing 0.5\text{mm}$ Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	12.5g(Plastic Case)/15.0g(Metal Case)
Dimensions	1.25"x0.8"x0.4"



ENVIRONMENT SPECIFICATIONS	
Operating Temperature	-40°C~85°C(See Derating Curve)
Maximum Case Temperature	100°C
Storage Temperature	-40°C~125°C
Cooling	Nature Convection

ABSOLUTE MAXIMUM RATINGS(4)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
5 Models	15 Vdc ,max.
12 Models	24 Vdc ,max.
24 Models	40 Vdc ,max.
48 Models	80 Vdc ,max.
Soldering Temperature (1.5mm from case 10sec. max.)	260°C ,max.

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

## RG - 1.5W 2:1 Regulated Single & Dual output

### PART NUMBER STRUCTURE

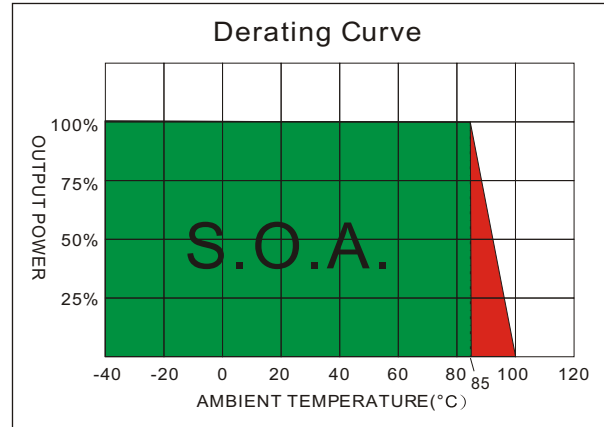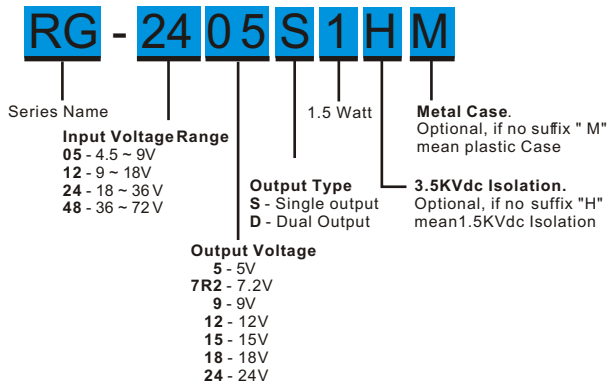

### MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(µF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RG-050 5S1	4.5-9	40	429	5	75	300	70	2200
RG-057 R2S1	4.5-9	40	423	7.2	52	208	70	1000
RG-050 9S1	4.5-9	40	423	9	42	167	71	470
RG-051 2S1	4.5-9	40	417	12	125	125	72	470
RG-051 5S1	4.5-9	40	417	15	31	100	72	470
RG-051 8S1	4.5-9	40	417	18	21	83	72	220
RG-052 4S1	4.5-9	40	429	24	16	63	72	220
RG-0505 D1	4.5-9	40	423	±5	±38	±150	65	±1000
RG-057R2 D1	4.5-9	40	423	±7.2	±26	±104	65	±220
RG-0509 D1	4.5-9	40	417	±9	±21	±83	67	±220
RG-0512 D1	4.5-9	40	417	±12	±16	±63	70	±220
RG-0515 D1	4.5-9	40	417	±15	±13	±50	67	±220
RG-0518 D1	4.5-9	40	423	±18	±10	±42	66	±220
RG-0524 D1	4.5-9	40	423	±24	±8	±31	66	±100
RG-120 5S1	9-18	20	176	5	75	300	71	2200
RG-127 R2S1	9-18	40	176	7.2	52	208	71	1000
RG-120 9S1	9-18	20	171	9	42	167	73	470
RG-121 2S1	9-18	20	171	12	125	125	73	470
RG-121 5S1	9-18	20	169	15	31	100	74	470
RG-121 8S1	9-18	40	174	18	21	83	72	220
RG-122 4S1	9-18	20	176	24	16	63	71	220
RG-1205 D1	9-18	20	176	±5	±38	±150	71	±1000
RG-127R2 D1	9-18	40	176	±7.2	±26	±104	71	±220
RG-1209 D1	9-18	20	171	±9	±21	±83	73	±220
RG-1212 D1	9-18	20	169	±12	±16	±63	74	±220
RG-1215 D1	9-18	20	171	±15	±13	±50	73	±220
RG-1218 D1	9-18	40	171	±18	±10	±42	73	±220
RG-1224 D1	9-18	20	174	±24	±8	±31	72	±100
RG-240 5S1	18-36	12	87	5	75	300	72	2200
RG-247 R2S1	18-36	12	87	7.2	52	208	72	1000

Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

## RG - 1.5W 2:1 Regulated Single & Dual output

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(μF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RG-240 9S1	18-36	12	84	9	42	167	74	470
RG-241 2S1	18-36	12	83	12	125	125	75	470
RG-241 5S1	18-36	12	83	15	31	100	75	470
RG-241 8S1	18-36	12	83	18	21	83	75	220
RG-242 4S1	18-36	12	86	24	16	63	73	220
RG-2405 D1	18-36	12	87	±5	±38	±150	72	±1000
RG-247R2 D1	18-36	12	87	±7.2	±26	±104	72	±220
RG-2409 D1	18-36	12	84	±9	±21	±83	74	±220
RG-2412 D1	18-36	12	84	±12	±16	±63	74	±220
RG-2415 D1	18-36	12	84	±15	±13	±50	74	±220
RG-2418 D1	18-36	12	86	±18	±10	±42	73	±220
RG-2424 D1	18-36	12	87	±24	±8	±31	72	±100
RG-480 5S1	36-72	8	45	5	75	300	70	2200
RG-487 R2S1	36-72	8	43	7.2	52	208	72	1000
RG-480 9S1	36-72	8	43	9	42	167	73	470
RG-481 2S1	36-72	8	42	12	125	125	74	470
RG-481 5S1	36-72	8	42	15	31	100	74	470
RG-481 8S1	36-72	8	43	18	21	83	73	220
RG-482 4S1	36-72	8	44	24	16	63	71	220
RG-4805 D1	36-72	8	43	±5	±38	±150	72	±1000
RG-487R2 D1	36-72	8	43	±7.2	±26	±104	72	±220
RG-4809 D1	36-72	8	43	±9	±21	±83	73	±220
RG-4812 D1	36-72	8	43	±12	±16	±63	73	±220
RG-4815 D1	36-72	8	43	±15	±13	±50	73	±220
RG-4818 D1	36-72	8	43	±18	±10	±42	72	±220
RG-4824 D1	36-72	8	44	±24	±8	±31	71	±100

Suffix "H" means 3.5KVdc isolation


Suffix "M" means Metal Case instead of standard Plastic case

### NOTE

1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12μH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.

# RG - 1.5W 2:1 Regulated Single & Dual output


## MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

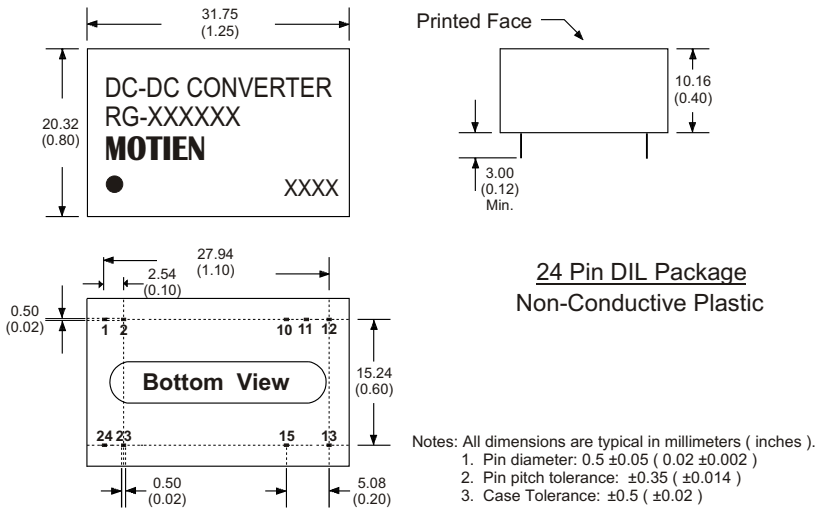

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	+V Input	+V Input
2	+V Input	+V Input
10	N.C.	Common
11	N.C.	Common
12	-V Output	N.C.
13	+V Output	-V Output
15	N.C.	+V Output
23	-V Input	-V Input
24	-V Input	-V Input

(The Pin Connection of high isolation one is the same with normal one.)

## MECHANICAL SPECIFICATIONS

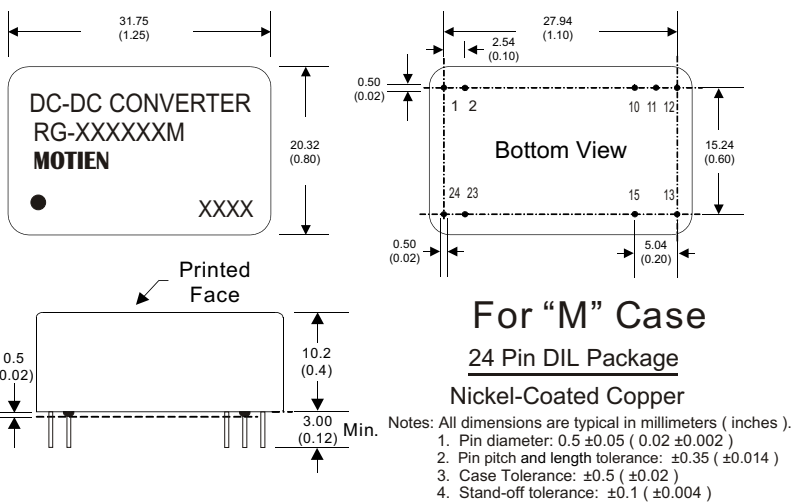

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	+V Input	+V Input
2	+V Input	+V Input
10	N.C.	Common
11	N.C.	Common
12	-V Output	N.C.
13	+V Output	-V Output
15	N.C.	+V Output
23	-V Input	-V Input
24	-V Input	-V Input

(The Pin Connection of high isolation one is the same with normal one.)