

FEATURES

- ▶ **Ultra-compact Dimensions:**
50.8x25.4x19.5 mm(2.0x1.0x0.8")
- ▶ **Fully encapsulated Module with Solder Pins for PCB Mounting**
- ▶ **Universal Input 85-264 VAC, 47-440 Hz**
- ▶ **Eco Design, compliant to Energy Star specification and ErP Directive 2009/125/EC**
- ▶ **Protection Class II**
- ▶ **Safety Approval to cUL/UL/IEC/EN 60950-1**
- ▶ **Over Load and Over Voltage Protection**
- ▶ **3 Years Product Warranty**


PRODUCT OVERVIEW

The MINMAX ADF-07 series is a new range of fully encapsulated AC/DC power supply modules. They are designed for direct PCB mounting with solder pins. The product features EMI-filter to EN55022, class B and EMS compliance to the EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets.

The ADF-07 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

Model Number	Output Voltage VDC	Output Current Max. mA	Input Current	Max. capacitive Load uF	Efficiency (typ.) @Max. Load %
			115VAC, 60Hz @Max. Load mA(typ.)		
ADF-07S03	3.3	1400	96	2200	70
ADF-07S05	5	1400	139	2200	73
ADF-07S12	12	583	130	1000	78
ADF-07S15	15	466	130	1000	78
ADF-07S24	24	291	130	680	78

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	440	Hz
Input Voltage Range		120	---	370	VDC
No-Load Power Consumption		---	---	0.3	W
Inrush Current (Cold Start at 25°C)	115VAC	---	---	10	A
	230VAC	---	---	20	A

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	±1.0	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.5	±1.0	%
Load Regulation	Iout=Min. to Max.	---	±0.5	±1.0	%
Ripple & Noise (20MHz)	3.3 & 5.0VDC Output Models	---	1.5	1.8	%V _{PP} of V _o
	Other Output Models	---	0.8	1.0	%V _{PP} of V _o
Minimum Load		---	10	---	%I _{nom.}
Over Voltage Protection	Zener diode clamp	---	120	---	% of V _o
Temperature Coefficient		---	±0.01	±0.02	%/°C
Overshoot		---	---	5	% V _{out}
Current Limitation	Foldback, auto-recovery (long term overload condition may cause damage)	105	---	---	%I _{nom.}
Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)				

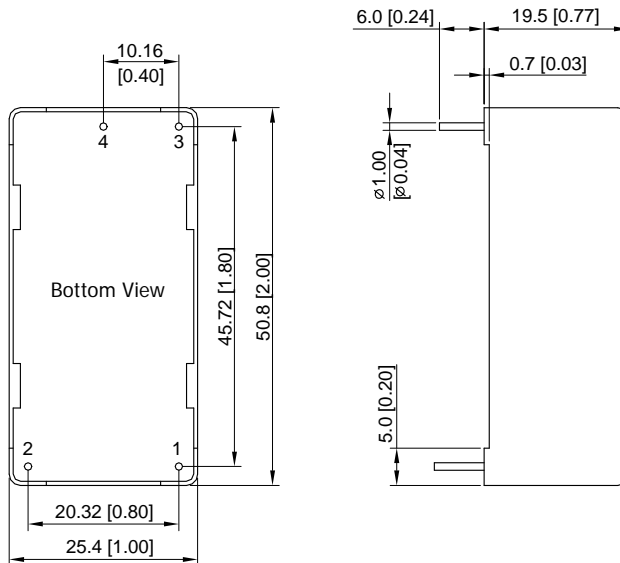
General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Input to Output, 60 Seconds	3000	---	---	VACrms
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	100	---	KHz
Hold-up Time		---	20	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	330,000	---	---	Hours
EMC Emission	Conducted and radiated	EN 55011, class B, EN 55022, class B, FCC part 15, class B			
EMC Immunity according EN61000-6-1	Standard	Specification Requirement			Performance Criteria
	EN61000-4-2	Air ±8KV Cont. ±4KV			B
	EN61000-4-3	80~1000MHz, 10V/m 80% AM, 1KHz modulation			A
	EN61000-4-4	AC port ±2KV DC, SL, TL ±2KV not less than 1 min.			B
	EN61000-4-5	1.2/50uS(8/20uS) AC dif. ±1KV DC ±0.5KV			B
	EN61000-4-6	0.15~80MHz, 10Vrms (functional earth ports included) 80% AM, 1KHz modulation			B
	EN61000-4-8	50Hz/60Hz, 30A/m			A
	EN61000-4-11	30%, 10ms 60%, 100ms, 95%, 5000ms			B C
Protection Class II		According IEC/EN 60536			
Safety Approvals		cUL/UL 60950-1, IEC/EN 60950-1			

Input Fuse	
All Models	
External Fuse (Recommended)	1.5A Slow – Blow Type

Environmental Specifications			
Parameter	Conditions		
Temperature Range (operational)	Ambient	-25°C	+70°C
Power Derating	+50°C to +70°C		0.263W / °C
Storage Temperature Range		-40°C	+85°C
Over Temperature Protection	at 90°C (automatic recovery at 67°C)		
Cooling	Free-Air convection		
Humidity (non condensing)		---	95 % rel. H

Notes	
1	All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
2	Ripple & Noise measurement bandwidth is 0~20 MHz
3	These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications.
4	All AC/DC modules should be externally fused at the front end for protection.
5	Other input and output voltage may be available, please contact factory.
6	Specifications subject to change without notice

Package Specifications

Mechanical Dimensions		Pin Connections	
		Pin	Function
		1	AC(N) – AC Neutral
		2	AC(L) – AC Line
		3	+Vout
		4	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ±0.5 (±0.02)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04±0.004)

Physical Characteristics

Case Size	: 50.8x25.4x19.5mm (2.00x1.00x0.77 Inches)
Case Material	: Plastic resin + Fiberglass (flammability to UL 94V-0 rated)
Weight	: 44g