




1000Vdc Isolation Single & Dual Output 2 Watt Dc-Dc Converter



FEATURES:

- 7PIN SIP Package
- High Efficiency up to 85%
- Output Continuous Short Circuit Protection
- Unregulated Output Types
- Internal SMD Construction
- Industry Standard Pinout
- Operating Temperature: -40°C TO +105°C



Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Ripple & Noise		Efficiency
	Vdc	mA	Typ(mVp-p)	Max(mVp-p)	%Typ
14DB-05S05N2W	5	400	60	100	80
14DB-05S09N2W	9	222	60	100	82
14DB-05S12N2W	12	167	60	100	82
14DB-05S15N2W	15	133	60	100	82
14DB-12S05N2W	5	400	60	100	82
14DB-12S09N2W	9	222	60	100	82
14DB-12S12N2W	12	167	60	100	84
14DB-12S15N2W	15	133	60	100	84
14DB-15S05N2W	5	400	60	100	80
14DB-15S09N2W	9	222	60	100	82
14DB-15S12N2W	12	167	60	100	83
14DB-15S15N2W	15	133	60	100	83
14DB-24S05N2W	5	400	60	100	82
14DB-24S09N2W	9	222	60	100	84
14DB-24S12N2W	12	167	60	100	84
14DB-24S15N2W	15	133	60	100	84
14DB-24S24N2W	24	84	60	100	85
14DB-05D05N2W	±5	±200	60	120	80
14DB-05D09N2W	±9	±111	60	120	82
14DB-05D12N2W	±12	±84	60	120	82
14DB-05D15N2W	±15	±67	60	120	82
14DB-12D05N2W	±5	±200	60	120	82
14DB-12D09N2W	±9	±111	60	120	84
14DB-12D12N2W	±12	±84	60	120	84
14DB-12D15N2W	±15	±67	60	120	84
14DB-15D05N2W	±5	±200	60	120	80
14DB-15D09N2W	±9	±111	60	120	82
14DB-15D12N2W	±12	±84	60	120	83
14DB-15D15N2W	±15	±67	60	120	83
14DB-24D05N2W	±5	±200	60	120	82
14DB-24D09N2W	±9	±111	60	120	84
14DB-24D12N2W	±12	±84	60	120	84
14DB-24D15N2W	±15	±67	60	120	84

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo, Io Nom			±10	%
Filter	Capacitor				



Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit Protection	Continuous				
Line Regulation	For 1.0% OF Vin		1.2		%
Load Regulation	5V,9V (10% To 100% F.L)			15	%
Load Regulation	12~24V (10% To 100% F.L)			10	%
Load Regulation	±5V,±9V (10% To 100% F.L)			15	%
Load Regulation	±12~±24V (10% To 100% F.L)			10	%


Yuan Dean Scientific CO.,LTD 14DB-2W SERIES

1000Vdc Isolation Single & Dual Output 2 Watt Dc-Dc Converter

General Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency	Full load,nominal input		100		KHz
Operating Temperature		-40		+105	°C
Storage Temperature		-55		+125	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight			2.7		g
Dimensions			19.5x7.1x10.0		mm

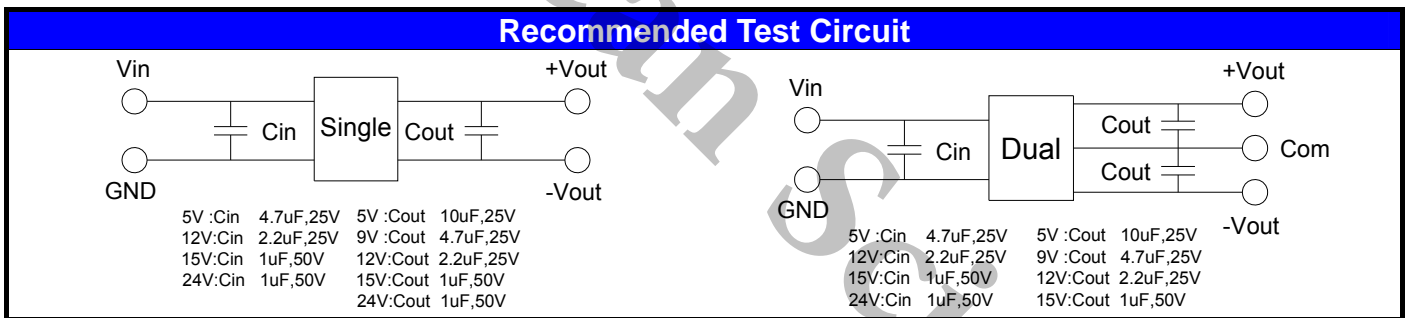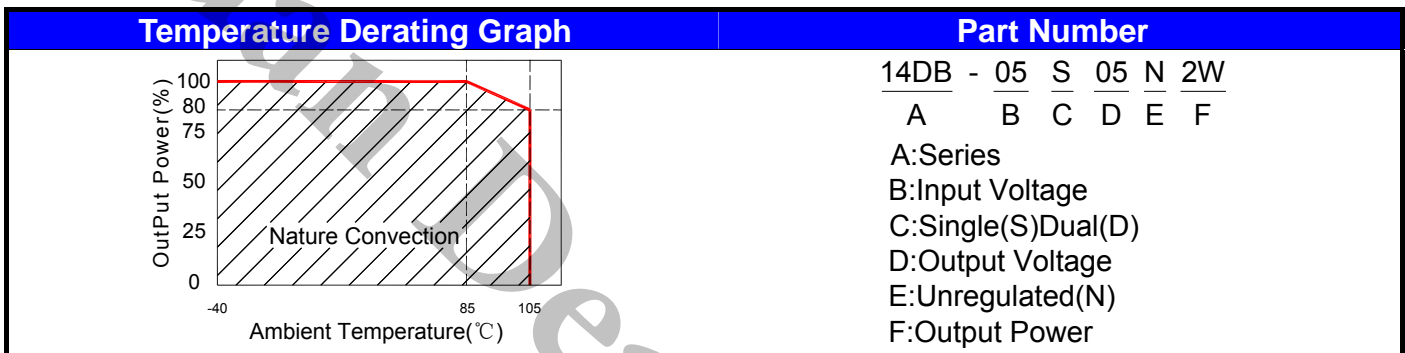

Markings and dimensions Packaging

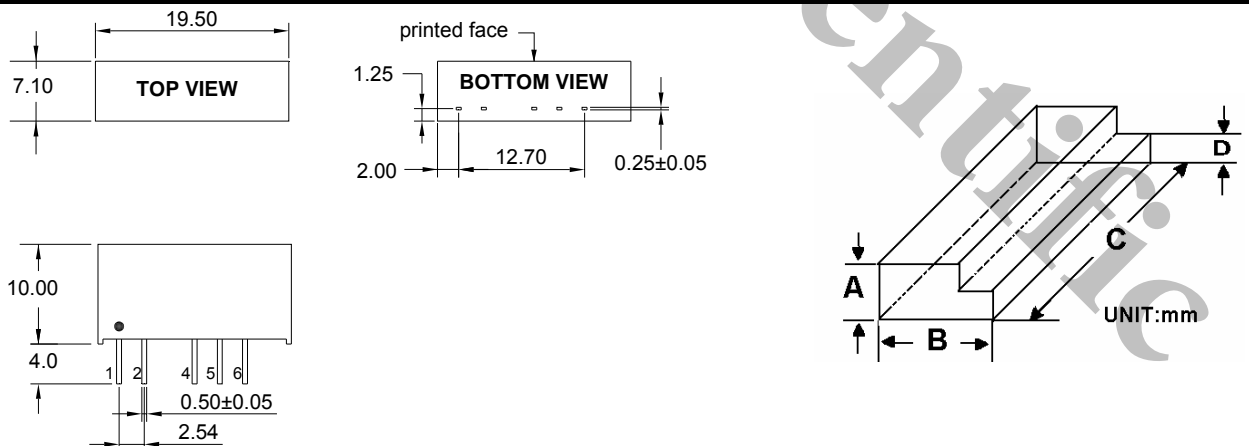

UNIT:mm Unless otherwise specified,all tolerances are ±0.25

PIN Connection					
PIN	1	2	4	5	6
Single	+Vin	-Vin	-Vout	No Pin	+Vout
Dual	+Vin	-Vin	-Vout	Com	+Vout

Size(mm)			
A	B	C	D
9.5	16.5	5.22	5.0