




500Vdc Isolation Single & Dual Output 3 Watt Dc-Dc Converter

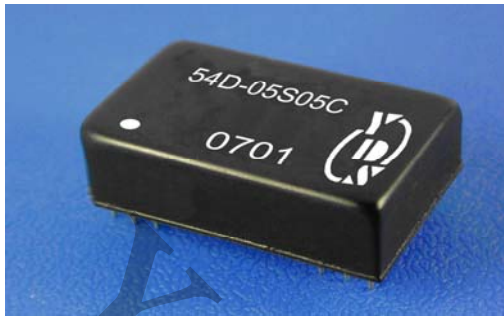

FEATURES:

- 24PIN DIL PACKAGE
- Low Ripple & Noise
- High Efficiency up to 85%
- Regulated Output Types
- Internal SMD Construction
- Operating Temperature: -40°C TO +85°C ● Industry Standard Pinout



Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

PART NO.	OUTPUT VOLTAGE	OUTPUT CURRENT	Efficiency
	Vdc	mA	%TYP
54D-XXS05C	5	600	65
54D-XXS09C	9	333	70
54D-XXS12C	12	250	75
54D-XXS15C	15	200	80
54D-XXS24C	24	125	80
54D-XXD05C	±5	±300	65
54D-XXD09C	±9	±167	70
54D-XXD12C	±12	±125	75
54D-XXD15C	±15	±100	80
54D-XXD24C	±24	±63	80

Note: 1."XX" Is Input Voltage :05=5Vdc,09=9Vdc,12=12Vdc,15=15Vdc,24=24Vdc,48=48Vdc.

2.The input voltage increases, there will be an increase in efficiency.

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo, Io Nom			±10	%
Filter	Capacitor				

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±3	%
Short Circuit Protection	Continuous				
Line Regulation	Regulated			±0.5	%
Load Regulation	Regulated			±0.8	%
Ripple & Noise	Output:5-9V TYPES BW=DC To 20MHz			100	mVp-p
Ripple & Noise	Output:12-24V TYPES BW=DC To 20MHz			1% of Vout	mVp-p
Transient response setting time	50% load step change		350		us

General Specifications

Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency	Full load,nominal input		100		KHz
Operating Temperature		-40		85	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	Nickel Coated With Non-Conductive Base or Black Coated Copper With Non-Conductive Base				
MTBF	MIL-HDBK-217F@25°C	1500000			Hours
Weight			16.2		g
Dimensions		31.80x20.60x10.16			mm



500Vdc Isolation Single & Dual Output 3 Watt Dc-Dc Converter

Temperature Derating Graph	Part Number
	54D - 05 S 05 C
	A B C D E
	A:Series
	B:Input Voltage
	C:Single(S) Dual(D)
	D:Output Voltage
	E:Types

Recommended Test Circuit	
<p>Cin: 10uF,100V Cout: 100uF,25V</p>	<p>Cin: 10uF,100V Cout: 100uF,25V</p>

Markings and dimensions	Packaging									
<p>UNIT:mm Unless otherwise specified, all tolerances are ±0.25</p>	<table border="1"> <thead> <tr> <th colspan="3">SIZE(mm)</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>18.71</td> <td>23.00</td> <td>52.2</td> </tr> </tbody> </table>	SIZE(mm)			A	B	C	18.71	23.00	52.2
SIZE(mm)										
A	B	C								
18.71	23.00	52.2								

PIN Connection												
PIN	1	2	3	10	11	12	13	14	15	22	23	24
Single	+Vin	NC	NC	-Vout	+Vout	-Vin	-Vin	+Vout	-Vout	NC	NC	+Vin
Dual	+Vin	-Vout	Com	Com	+Vout	-Vin	-Vin	+Vout	Com	Com	-Vout	+Vin