

VNW Series

15W 4:1 Regulated Single & Dual output



Features

- Ultra Wide 4:1 Input Range
- Soft Start
- 1600 VDC Isolation
- Efficiency up to 89%
- Extended Operating Temperature Range -40 ~ 85°C max.
- Adjustable Output Voltage
- Remote On/Off Control (CTRL)
- Over Current Protection
- Over Voltage Protection
- No Minimum Load Required
- 50% Volume than traditional products



The VNW series is a family of high performance 15W single & dual output DC-DC converters. These converters are built in nickel-coated copper package in a 1"x1" case with non conductive base - precise controlling and protection provide: tight line / load regulation, soft start, over current and over voltage protection. Input voltages of 24 and 48 with output voltage of 3.3, 5, 12, 15, ± 5 , ± 12 , ± 15 Vdc maximum. Positive and negative logic ON/OFF control optional. Products are built in a case which is only half size of conventional 2"x1" package.

ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED.

OUTPUT SPECIFICATIONS	
Output Voltage Accuracy	$\pm 1\%$
Output Voltage Adjustability(Trim)	Single output: $\pm 10\%$, max.
Maximum Output Current	See table
Line Regulation	$\pm 0.2\%$, max.
Load Regulation($I_o=0\%$ to 100%)	Single: $\pm 0.5\%$, max. Dual: $\pm 1\%$, max(balanced load)
Cross Regulation (Dual Output) (1)	$\pm 5\%$
Ripple&Noise(20MHz bandwidth) (2)	100mVpk-pk, max.
	3.3V output 3.9V
	5V output 6.2V
Over Voltage Protection	12V output 15V
(Zener diode clamp)	15V output 18V
	± 5 V output ± 6.2 V
	± 12 V output ± 15 V
	± 15 V output ± 18 V
Over Current Protection	170% of FL, typ.
Short Circuit Protection	Indefinite(hiccup) (Automatic Recovery)
Temperature Coefficient	$\pm 0.02\%/^{\circ}\text{C}$
Capacitive Load (3)	See table
Transient Recovery Time (4)	250us, typ.
Transient Response Deviation(4)	$\pm 3\%$, max.

INPUT SPECIFICATIONS	
Input Voltage Range	See table
Start up Time	20mS, typ.
(Nominal V_{in} and constant resistive load)	
Input Filter	Pi Type
Input Current(No-Load)	See table, typ.
Input Current(Full-Load)	See table, max.
Input Reflected Ripple Current(5)	20mApk-pk, typ.
Remote On/Off (Positive logic)(6)	
	ON: 3.0 ~ 12Vdc or open circuit
	OFF: 0 ~ 1.2Vdc or Short circuit pin 2 and pin 3
	OFF idle current: 5 mA, typ.

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(60 sec)	
Input/Output	1600Vdc
Case/Input & Output	1600Vdc
Isolation Resistance	1000 M Ω , min.
Isolation Capacitance	1200 pF, max.
Switching frequency	375kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>560 khrs
Safety Standard (designed to meet)	IEC/EN 60950-1

EMC CHARACTERISTICS		
Radiated Emissions	EN55022	CLASS A
Conducted Emissions(7)	EN55022	CLASS A
ESD	IEC61000-4-2	Perf. Criteria A
RS	IEC61000-4-3	Perf. Criteria A
EFT(8)	IEC61000-4-4	Perf. Criteria A
Surge (8)	IEC61000-4-5	Perf. Criteria A
CS	IEC61000-4-6	Perf. Criteria A
PFMF	IEC61000-4-8	Perf. Criteria A

PHYSICAL SPECIFICATIONS	
Case Material	Nickel-coated Copper
Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	$\Phi 1.0$ mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	18.0g
Dimensions	1.00"x1.00"x0.40"



ENVIRONMENTAL SPECIFICATIONS	
Operating Ambient Temperature	-40°C ~ +85°C(See Derating Curve) -40°C ~ +66°C(For 100% load)
Maximum Case Temperature	105°C
Storage Temperature	-55°C ~ +125°C
Cooling(9)	Nature Convection

ABSOLUTE SPECIFICATIONS (10)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
24 Models	50 Vdc, max.
48 Models	100 Vdc, max.
Soldering Temperature	260C, max.
(1.5mm from case 10 sec. max.)	

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

VNW - 15W 4:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

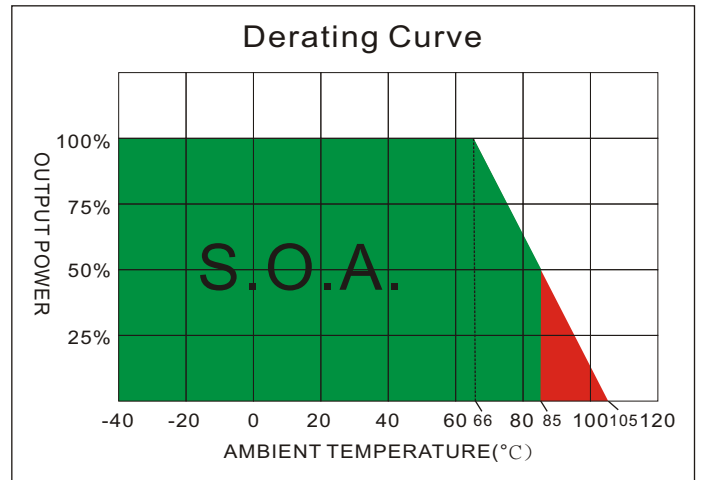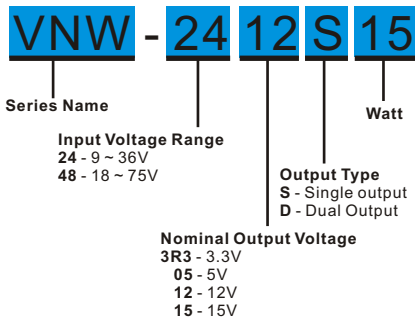


MODEL SELECTION GUIDE





MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
VNW-243R3S15	9-36	15	647	3.3	0	4000	86	1000
VNW-2405S15	9-36	15	727	5	0	3000	87	1000
VNW-2412S15	9-36	15	747	12	0	1300	88	330
VNW-2415S15	9-36	15	710	15	0	1000	89	220
VNW-483R3S15	18-75	10	331	3.3	0	4000	84	1000
VNW-4805S15	18-75	10	368	5	0	3000	86	1000
VNW-4812S15	18-75	10	378	12	0	1300	87	330
VNW-4815S15	18-75	10	360	15	0	1000	88	220
VNW-2405D15	9-36	15	744	±5	0	±1500	85	±470
VNW-2412D15	9-36	15	718	±12	0	±625	88	±220
VNW-2415D15	9-36	15	710	±15	0	±500	89	±100
VNW-4805D15	18-75	10	376	±5	0	±1500	84	±470
VNW-4812D15	18-75	10	363	±12	0	±625	87	±220
VNW-4815D15	18-75	10	359	±15	0	±500	88	±100

NOTE


- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Measured with a 1.0uF ceramic capacitor and 10uF tantalum capacitor.
- Tested by minimal Vin and constant resistive load.
- Tested by normal Vin and 25% load step change (75%-50%-25% of Io).
- Measured Input reflected ripple current with a simulated source inductance of 12uH and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz).
- The remote on/off control pin is referenced to -Vin(pin2).
- Input filter components (C1, C2, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.
- An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5. The filter capacitor Motien suggest: Nippon chemi-con KY series, 220uF/100V.
- Nature Convection" is usually about 30-65 LFM but is not equal to still air (0 LFM).
- Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.

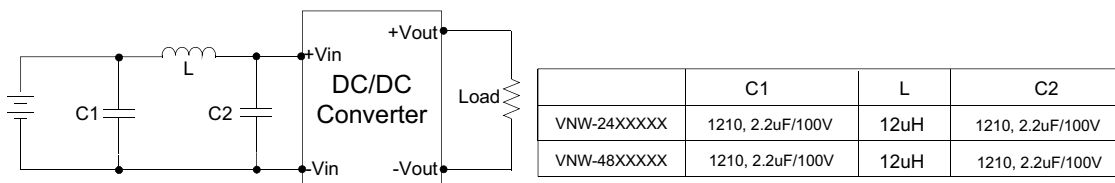

VNW - 15W 4:1 Regulated Single & Dual output

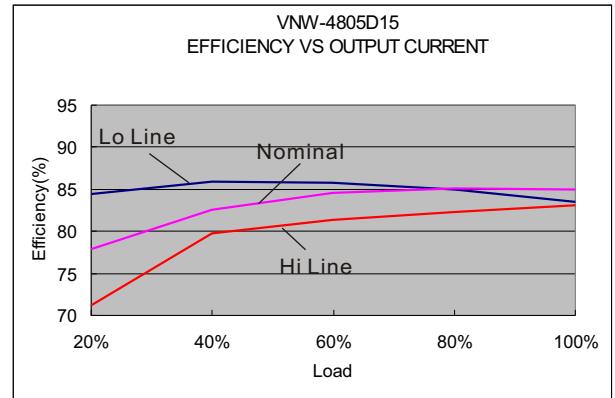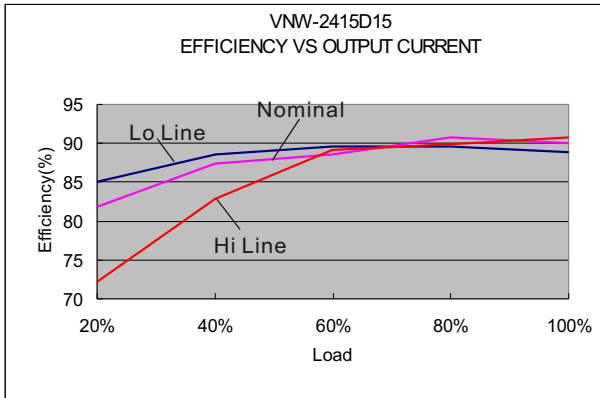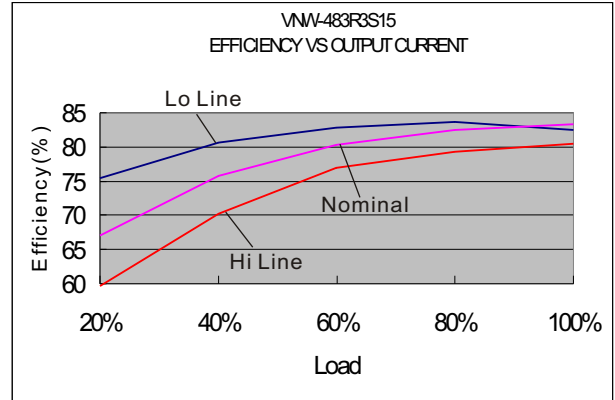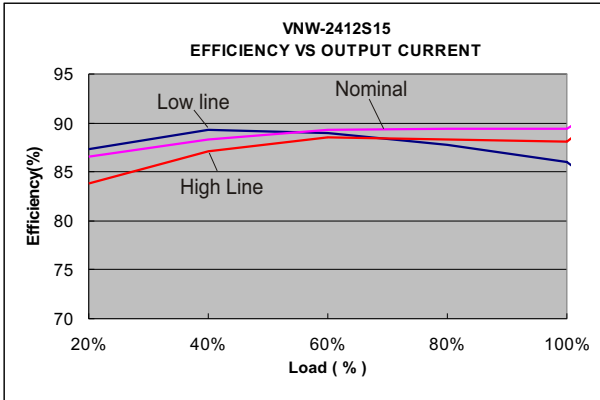


MECHANICAL SPECIFICATIONS

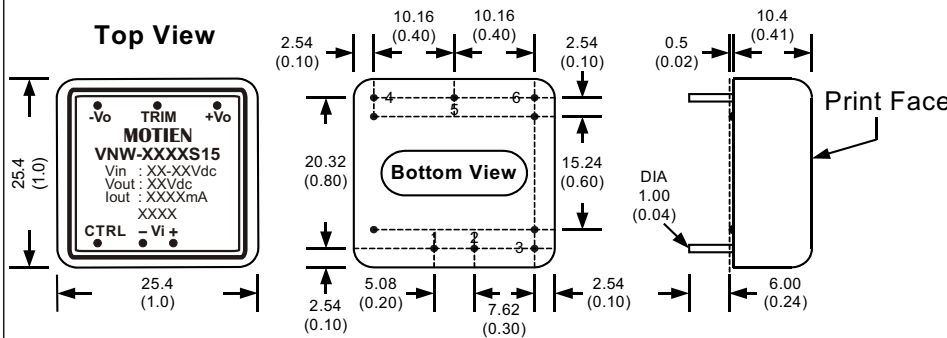

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL	CTRL
4	+Vout	+Vout
5	Trim	Com
6	-Vout	-Vout

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method as below. (single output models only)



- All dimensions are typical in millimeters (inches).
1. Pin diameter: 1.0 ± 0.05 (0.04 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)
 4. Stand-off tolerance: ± 0.1 (± 0.004)