

**SERIES:** VSK-S1 | **DESCRIPTION:** AC-DC POWER SUPPLY

**FEATURES**

- up to 1 W continuous power
- compact board mount design
- universal input (85~305 Vac / 120~430 Vdc)
- single output from 3.3~24 V
- over current and short circuit protection
- UL/cUL and CE safety approvals
- efficiency up to 75%



MODEL	output voltage	output current	output power	ripple and noise <sup>1</sup>	efficiency
	(Vdc)	max (mA)	max (W)	max (mVp-p)	typ (%)
VSK-S1-3R3U	3.3	300	1	200	63
VSK-S1-5U	5	200	1	200	68
VSK-S1-9U	9	111	1	200	72
VSK-S1-12U	12	83	1	200	73
VSK-S1-15U	15	67	1	200	74
VSK-S1-24U	24	42	1	200	75

Notes: 1. At full load 20 MHz bandwidth oscilloscope, see Test Configuration section.

**PART NUMBER KEY**



## INPUT

parameter	conditions/description	min	typ	max	units
voltage		85 120		305 430	Vac Vdc
frequency		47		63	Hz
current	at 115 Vac at 230 Vac		30 17		mA mA
inrush current	at 115 Vac at 230 Vac		5 11		A A
leakage current				0.15	mA

## OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitave load	3.3 and 5 V output models 9 and 12 V output models 15 V output model 24 V output model			4,000 2,200 1,000 680	$\mu$ F $\mu$ F $\mu$ F $\mu$ F
line regulation				$\pm$ 2	%
load regulation	10 ~ 100%			$\pm$ 5	%
voltage accuracy	3.3 V model all other models			$\pm$ 6 $\pm$ 5	% %
switching frequency				100	kHz

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection		110			%
short circuit protection	continuous, auto restart				

## SAFETY & COMPLIANCE


parameter	conditions/description	min	typ	max	units
isolation voltage	for 1 minute	3,000			Vac
safety approvals	UL 60950-1				
safety class	class II				
conducted emissions	CISPR22/EN55022 Class B				
radiated emissions	CISPR22/EN55022 Class B				
ESD	IEC/EN61000-4-2 class B, contact $\pm$ 4kV, air $\pm$ 8kV				
radiated immunity	IEC/EN61000-4-3 class A, 10V/m				
EFT/burst	IEC/EN61000-4-4 class B, $\pm$ 2kV (external circuit required, see figure 3)				
surge	IEC/EN61000-4-5 class B, $\pm$ 2kV (external circuit required, see figure 3)				
conducted immunity	IEC/EN61000-4-6 class A, 10 Vr.m.s				
PFM	IEC/EN61000-4-8 class A, 10 A/m				
voltage dips & interruptions	IEC/EN61000-4-11 class B, 0%-70%				
MTBF	25°C	300,000			hrs
RoHS	2011/65/EU				

## ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-25		70	°C
storage temperature		-40		85	°C
operating humidity	non-condensing			90	%
storage humidity	non-condensing			95	%

## DERATING CURVES


1. output power vs. ambient temperature (85~305 Vac)

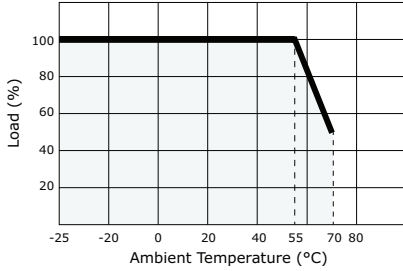

2. efficiency vs. output power (Vin=220Vac)

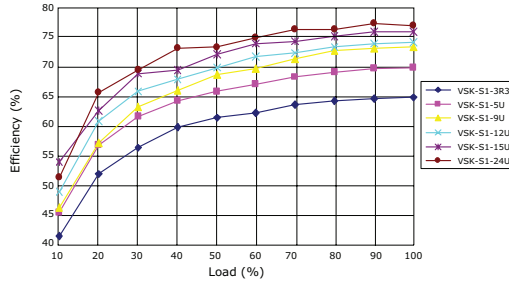

3. efficiency vs. input voltage (load=100%)

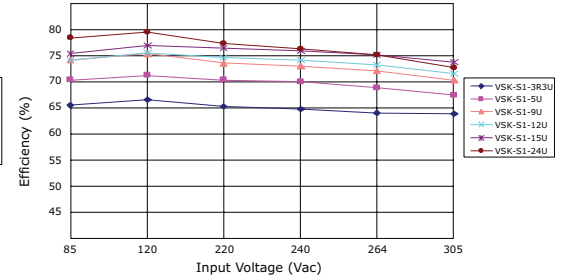

## MECHANICAL


parameter	conditions/description	min	typ	max	units
dimensions	33.70 x 22.20 x 18.00 (1.327 x 0.874 x 0.708 inch)				mm
case material	UL94V-0				
weight			20		g

## MECHANICAL DRAWING




units: mm [inches]

tolerance: ±0.5 [±0.02]

pin section tolerance: ±0.10 mm [±0.004]

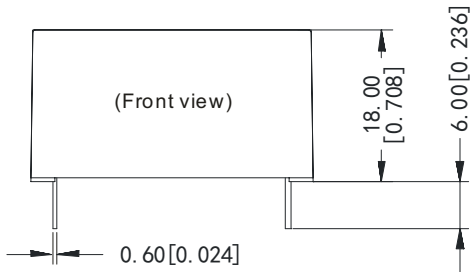

PIN CONNECTIONS	
PIN	FUNTION
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

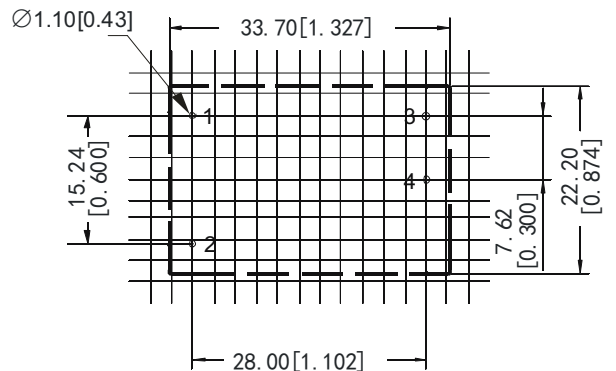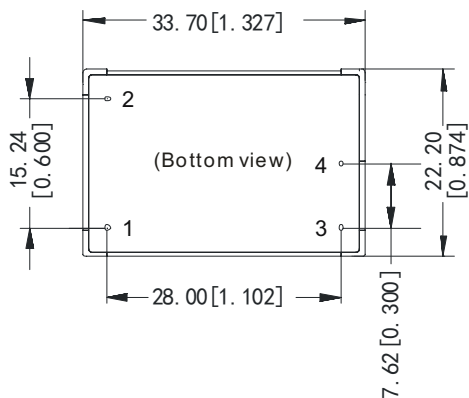

## TEST CONFIGURATION

Figure 1

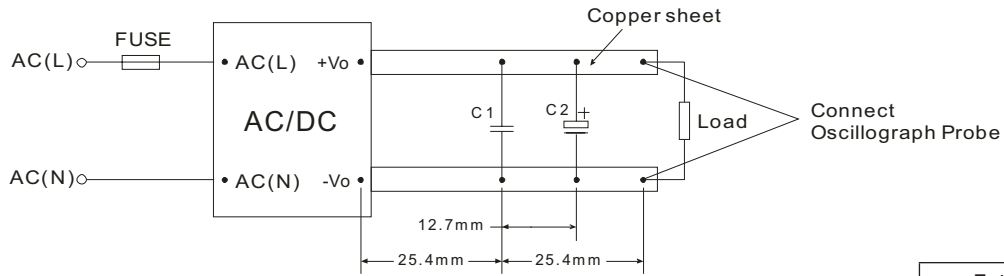


Table 1

External components	
C1	1µF ceramic
C2	10µF electrolytic

## TYPICAL APPLICATION CIRCUIT

Figure 2


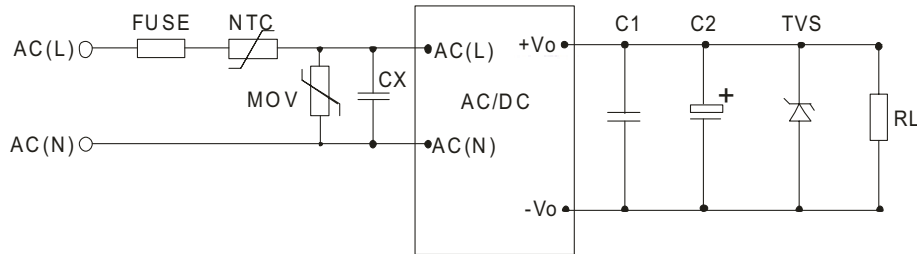


Table 2

Recommended external circuit components										
Model	FUSE	NTC	MOV	LCM	TVS <sup>1</sup>	C1 <sup>2</sup>	C2 <sup>3</sup>	CY3	CY4	CX
VSK-S1-3R3U	1A/300V, slow blow	5D-9	S14K350	10 mH	SMBJ7.0A	1µF/50V	220µF	2.2nF/400V	2.2nF/400V	0.1µF/305Vac
VSK-S1-5U	1A/300V, slow blow	5D-9	S14K350	10 mH	SMBJ7.0A	1µF/50V	220µF	2.2nF/400V	2.2nF/400V	0.1µF/305Vac
VSK-S1-9U	1A/300V, slow blow	5D-9	S14K350	10 mH	SMBJ12A	1µF/50V	120µF	2.2nF/400V	2.2nF/400V	0.1µF/305Vac
VSK-S1-12U	1A/300V, slow blow	5D-9	S14K350	10 mH	SMBJ20A	1µF/50V	120µF	2.2nF/400V	2.2nF/400V	0.1µF/305Vac
VSK-S1-15U	1A/300V, slow blow	5D-9	S14K350	10 mH	SMBJ20A	1µF/50V	120µF	2.2nF/400V	2.2nF/400V	0.1µF/305Vac
VSK-S1-24U	1A/300V, slow blow	5D-9	S14K350	10 mH	SMBJ30A	1µF/50V	68µF	2.2nF/400V	2.2nF/400V	0.1µF/305Vac

## EMC RECOMMENDED CIRCUIT

Figure 3

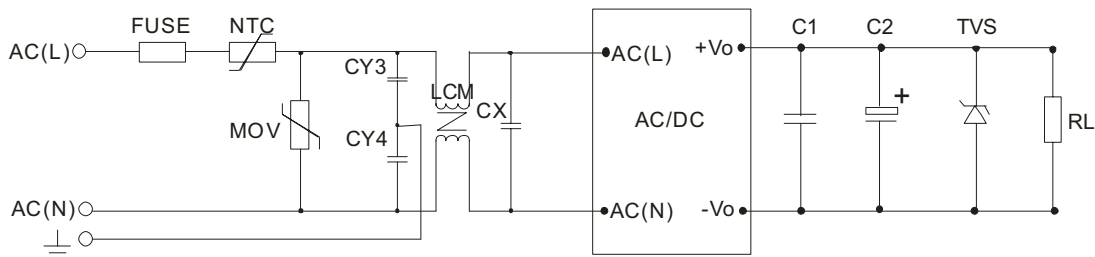

- Notes:
1. See Table 2 for EMC components.
  2. TVS is a recommended component to protect post-circuits if converter fails.
  3. C1 is a ceramic capacitor used to filter high frequency noise.
  4. C2 is an electrolytic capacitor. We recommend using high frequency and low impedance electrolytic capacitors. For capacitance and current of capacitor please refer to the manufacturer's datasheet. Voltage derating of capacitor should be 80% or above.
  5. All specifications are measured at rated input voltage, rated output load, TA=25°C, and humidity < 75% unless otherwise specified.

## REVISION HISTORY

---

<b>rev.</b>	<b>description</b>	<b>date</b>
1.0	initial release	06/04/2012
1.01	picture updated	09/06/2012
1.02	updated derating curves and spec	11/12/2013

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**<sup>®</sup>

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.