

**FEATURES**

- ▶ Standard SIP-7 Package
- ▶ Very high 5200V I/O-isolation
- ▶ Common Mode Transient Immunity: 15KV/ $\mu$ s
- ▶ Operating Temp. Range -40°C to +85°C
- ▶ Industry Standard Pinout
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval
- ▶ 3 Years Product Warranty


**PRODUCT OVERVIEW**

The MINMAX MA01-HI series is a new range of isolated 1W DC/DC converter modules in SIP-package which feature a very high I/O-isolation voltage rated for 5200V. A very high common mode transient immunity qualifies these product for IGBT applications. There are 40 Models available for 5, 12, 15 or 24VDC input. These converters offer a cost-effective solution for all applications where a very high I/O –isolation is required.

**Model Selection Guide**

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current Max. mA	Input Current		Load Regulation % (max.)	Max. capacitive Load $\mu$ F	Efficiency (typ.) @Max. Load %
				@Max. Load mA(typ.)	@No Load mA(typ.)			
MA01-05S033HI	5 $\pm$ 10%	3.3	303	286	35	20	1000	70
MA01-05S05HI		5	200	286		15	470	70
MA01-05S09HI		9	111	266		10	470	75
MA01-05S12HI		12	84	261		10	220	77
MA01-05S15HI		15	66	254		10	220	78
MA01-05D05HI		$\pm$ 5	$\pm$ 100	282		15	220#	71
MA01-05D09HI		$\pm$ 9	$\pm$ 56	269		10	220#	75
MA01-05D12HI		$\pm$ 12	$\pm$ 42	262		10	100#	77
MA01-05D15HI		$\pm$ 15	$\pm$ 33	254		10	100#	78
MA01-05A1509HI		15	+33	260		10	100	76
	-9	-55	220					
MA01-12S033HI	12 $\pm$ 10%	3.3	303	117	17	20	1000	71
MA01-12S05HI		5	200	117		15	470	71
MA01-12S09HI		9	111	110		10	470	76
MA01-12S12HI		12	84	108		10	220	78
MA01-12S15HI		15	66	104		10	220	79
MA01-12D05HI		$\pm$ 5	$\pm$ 100	116		15	220#	72
MA01-12D09HI		$\pm$ 9	$\pm$ 56	111		10	220#	76
MA01-12D12HI		$\pm$ 12	$\pm$ 42	108		10	100#	78
MA01-12D15HI		$\pm$ 15	$\pm$ 33	104		10	100#	79
MA01-12A1509HI		15	+33	107		10	100	77
	-9	-55	220					
MA01-15S033HI	15 $\pm$ 10%	3.3	303	95	16	20	1000	70
MA01-15S05HI		5	200	95		15	470	70
MA01-15S09HI		9	111	89		10	470	75
MA01-15S12HI		12	84	90		10	220	75
MA01-15S15HI		15	66	84		10	220	79
MA01-15D05HI		$\pm$ 5	$\pm$ 100	94		15	220#	71
MA01-15D09HI		$\pm$ 9	$\pm$ 56	90		10	220#	75
MA01-15D12HI		$\pm$ 12	$\pm$ 42	86		10	100#	78
MA01-15D15HI		$\pm$ 15	$\pm$ 33	84		10	100#	79
MA01-15A1509HI		15	+33	87		10	100	76
	-9	-55	220					
MA01-24S033HI	24 $\pm$ 10%	3.3	303	60	12	20	1000	70
MA01-24S05HI		5	200	60		15	470	70
MA01-24S09HI		9	111	56		10	470	75
MA01-24S12HI		12	84	53		10	220	78
MA01-24S15HI		15	66	52		10	220	80
MA01-24D05HI		$\pm$ 5	$\pm$ 100	59		15	220#	71
MA01-24D09HI		$\pm$ 9	$\pm$ 56	56		10	220#	75
MA01-24D12HI		$\pm$ 12	$\pm$ 42	55		10	100#	77
MA01-24D15HI		$\pm$ 15	$\pm$ 33	53		10	100#	78
MA01-24A1509HI		15	+33	55		10	100	75
	-9	-55	220					

# For each output

**Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	15V Input Models	-0.7	---	20	
	24V Input Models	-0.7	---	30	
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	15V Input Models	13.5	15	16.5	
	24V Input Models	21.6	24	26.4	
Internal Filter Type	All Models	Internal Capacitor			

**Output Specifications**


Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	---	±5.0	%
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%
Line Regulation	For Vin Change of 1%	---	±1.2	---	%
Load Regulation	Io=20% to 100%	See Model Selection Guide			
Ripple & Noise	0-20MHz Bandwidth	---	---	100	mV <sub>P-P</sub>
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection	Continuous				

**General Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	5200	---	---	VDC
I/O Isolation Test Voltage	Flash tested for 1 Seconds	5700	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100KHz, 1V	---	7	---	pF
Common Mode Transient Immunity		15	---	---	KV/μs
Switching Frequency		---	100	---	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-scheme)				

**Environmental Specifications**

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+85	°C
Case Temperature		---	+100	°C
Storage Temperature Range		-55	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

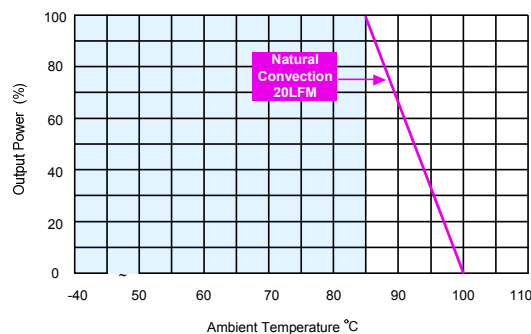
**Power Derating Curve**


**Notes**

- 1 Specifications typical at  $T_a = +25^{\circ}\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 6 Specifications are subject to change without notice.

**Package Specifications**

## Mechanical Dimensions

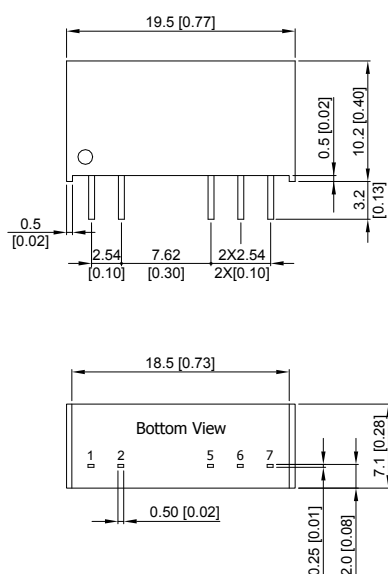

## Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No Pin	Common
7	+Vout	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance:  $X.X \pm 0.5$  ( $X.XX \pm 0.02$ )  
 $X.XX \pm 0.25$  ( $X.XXX \pm 0.01$ )
- ▶ Pins  $\pm 0.05$  ( $\pm 0.002$ )

**Physical Characteristics**

Case Size : 19.5x7.1x10.2mm (0.77x0.28x0.40 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)


Pin Material : Alloy 42

Weight : 2.4g

## Test Setup

### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.33 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

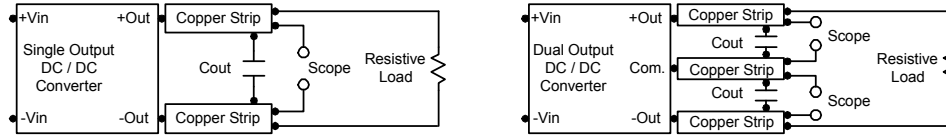


## Technical Notes

### Maximum Capacitive Load

The MA01-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.


### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 KHz) capacitor of a 2.2 $\mu$ F for the 5V input devices, a 1.0 $\mu$ F for the 12V,15V input devices and a 0.47 $\mu$ F for the 24V devices.

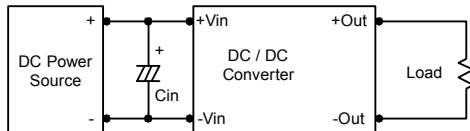

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1.0 $\mu$ F capacitors at the output.

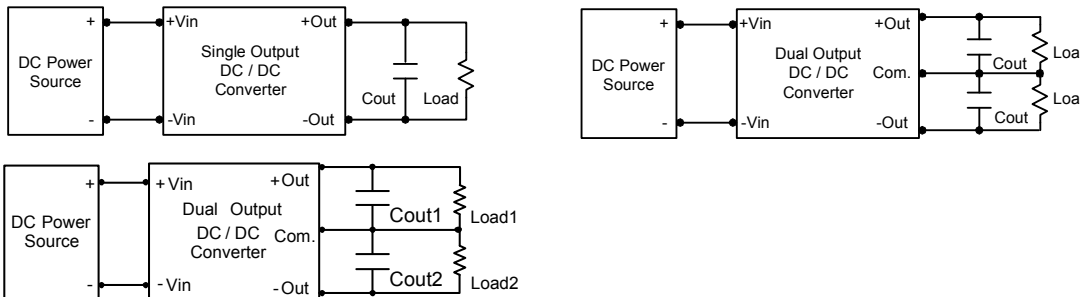

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100°C. The derating curves are determined from measurements obtained in a test setup.

