



# CHE100/CHE100W SERIES

## 100 WATT 2:1/4:1 INPUT

### DC-DC CONVERTERS

### SINGLE OUTPUT

## FEATURES

- \* 100W Isolated Output
- \* Half-Brick Size, Six-Sided Shield Metal Case
- \* High Efficiency to 93%
- \* 2:1/4:1 Input Range
- \* Regulated Outputs
- \* 250KHz Switching Frequency
- \* Continuous Short Circuit Protection
- \* Input under-voltage Protection
- \* Over Temperature/Voltage/Current Protection
- \* Remote ON/OFF
- \* Full Load Operation up to 60°C with Heat-sink M-C091 Natural Convention
- \* No Tantalum Capacitor Inside
- \* CE Mark Meets 2004/108/EC
- \* Safety Meets UL60950-1, EN60950-1, and IEC60950-1



### CHE100 Series

| MODEL NUMBER | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT |      | INPUT CURRENT |           | % EFF. | CAPACITOR LOAD MAX.   |
|--------------|---------------|----------------|----------------|------|---------------|-----------|--------|-----------------------|
|              |               |                | MIN.           | MAX. | NO LOAD       | FULL LOAD |        |                       |
| CHE100-24S12 | 18-36VDC      | 12VDC          | 0mA            | 8.4A | 200mA         | 4.57A     | 92     | 8400µF                |
| CHE100-24S24 | 18-36VDC      | 24VDC          | 0mA            | 4.2A | 100mA         | 4.57A     | 92     | 4200µF <sup>(2)</sup> |

### CHE100W Series

| MODEL NUMBER   | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT |      | INPUT CURRENT |           | % EFF. |      | CAPACITOR LOAD MAX.   |
|----------------|---------------|----------------|----------------|------|---------------|-----------|--------|------|-----------------------|
|                |               |                | MIN.           | MAX. | NO LOAD       | FULL LOAD | (4)    | (3)  |                       |
| CHE100W-24S3V3 | 9-36VDC       | 3.3VDC         | 0mA            | 25A  | 200mA         | 3.94A     | 85.5   | 87   | 25000µF               |
| CHE100W-24S05  | 9-36VDC       | 5VDC           | 0mA            | 20A  | 150mA         | 4.66A     | 88.5   | 89.5 | 20000µF               |
| CHE100W-24S12  | 9-36VDC       | 12VDC          | 0mA            | 8.4A | 200mA         | 4.62A     | 90     | 90.5 | 8400µF                |
| CHE100W-24S15  | 9-36VDC       | 15VDC          | 0mA            | 6.7A | 200mA         | 4.62A     | 89.5   | 90.5 | 6700µF                |
| CHE100W-24S24  | 9-36VDC       | 24VDC          | 0mA            | 4.2A | 100mA         | 4.76A     | 88.5   | 89   | 4200µF <sup>(2)</sup> |
| CHE100W-24S48  | 9-36VDC       | 48VDC          | 0mA            | 2.1A | 100mA         | 4.76A     | 89.5   | 88.5 | 2100µF <sup>(2)</sup> |
| CHE100W-48S3V3 | 18-75VDC      | 3.3VDC         | 0mA            | 25A  | 130mA         | 1.96A     | 87.5   | 88   | 25000µF               |
| CHE100W-48S05  | 18-75VDC      | 5VDC           | 0mA            | 20A  | 130mA         | 2.28A     | 91.5   | 92   | 20000µF               |
| CHE100W-48S12  | 18-75VDC      | 12VDC          | 0mA            | 8.4A | 100mA         | 2.26A     | 92.5   | 93   | 8400µF                |
| CHE100W-48S15  | 18-75VDC      | 15VDC          | 0mA            | 6.7A | 100mA         | 2.26A     | 91.5   | 92.5 | 6700µF                |
| CHE100W-48S24  | 18-75VDC      | 24VDC          | 0mA            | 4.2A | 100mA         | 2.32A     | 91     | 91   | 4200µF <sup>(2)</sup> |
| CHE100W-48S48  | 18-75VDC      | 48VDC          | 0mA            | 2.1A | 100mA         | 2.32A     | 91.5   | 90.5 | 2100µF <sup>(2)</sup> |

NOTE: 1. Nominal Input Voltage 24, 48 VDC

2. Require a 10µF Aluminum Capacitor Connected Between +Vout and -Vout for 24 & 48Vout Models.

3. Measured at Nominal Input Voltage.

4. Measured at 12VDC for 24SXX, 24VDC for 48SXX.

# SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

## INPUT SPECIFICATIONS:

|   |                               |             |
|---|-------------------------------|-------------|
| Input Voltage Range                           | 24V                           | 9-36V       |
|   | 48V                           | 18-75V      |
|   | CHE100-24SXX                  | 18-36V      |
| Input Surge Voltage (100ms max.)              | 24V                           | 50Vdc max.  |
|   | 48V                           | 100Vdc max. |
| Under voltage lockout                         | 24Vin power up                | 8.8V        |
|   | 24Vin power down              | 8.0V        |
|   | CHE100-24S24/48Vin power up   | 17V         |
|   | CHE100-24S24/48Vin power down | 16V         |
| Positive Logic Remote ON/OFF (see note 4 & 5) |                               |             |
| Input Filter                                  |                               | PI Type     |

## OUTPUT SPECIFICATIONS:

|   |                             |
|---|-----------------------------|
| Voltage Accuracy:                             | ±1.5% max.                  |
| Transient Response:25% Step Load Change       | <500u sec.                  |
| External Trim Adj. Range                      | ±10%                        |
| Ripple & Noise, 20MHz BW                      |                             |
| 3.3V & 5V                                     | 40mV RMS, 100mV pk-pk max.  |
| 12V & 15V                                     | 60mV RMS, 120mV pk-pk max.  |
| 24V   | 100mV RMS, 240mV pk-pk max. |
| 48V   | 200mV RMS, 480mV pk-pk max. |
| Temperature Coefficient                       | ±0.03%/°C                   |
| Short Circuit Protection                      | Continuous                  |
| Line Regulation (note 1)                      | ±0.2% max.                  |
| Load Regulation (note 2)                      | ±0.2% max.                  |
| Over Voltage Protection trip Range, % Vo nom. | 115-140%                    |
| Current Limit                                 | 110% ~140% Nominal Output   |
| Start up time                                 | 10mS typ.                   |

## GENERAL SPECIFICATIONS:



|                                    |   |
|------------------------------------|---|
| Efficiency                         | See Table   |
| Isolation Voltage                  | Input/Output 1500VDC min.                             |
|                                    | Input/Case, Output/Case 1500VDC min.                  |
| Isolation Resistance               | 10 <sup>7</sup> ohm min.                              |
| Isolation Capacitance              | 1000pF typ.   |
| Switching Frequency                | 250KHz typ.   |
| Operating Case Temperature         | -40°C to 105°C.                                       |
| Storage Temperature                | -55°C to +105°C                                       |
| Thermal Shutdown, Case Temperature | 110°C typ.  |
| Humidity                           | 95% RH max. Non condensing                            |
| MTBF                               | MIL-STD-217F, GB, 25°C, Full Load XXS05: 750Khrs typ. |
|                                    | Others: 880Khrs typ.                                  |

|               |   |
|---------------|---|
| Dimensions    | 2.28x2.40x0.50 inches (57.9x61.0x12.7 mm) |
| Case Material | Aluminum with Non-Conducted Base          |
| Weight        | 95 g                                      |

## NOTE:


- Measured from high line to low line.
- Measured from full load to zero load.
- Output ripple and noise measured with 10uF tantalum and 1uF ceramic capacitor across output.  
(24V & 48V:10uF aluminum and 1uF ceramic capacitor across output.)
- Logic compatibility open collector refer to -Vin  
Module on >3.5Vdc to 75Vdc or open circuit  
Module off < 1.2Vdc
- Suffix "N" to the model number with negative logic remote on/off  
Module on < 1.2Vdc  
Module off >3.5Vdc to 75Vdc or open circuit

CASE HB  
All Dimensions In Inches(mm)  
Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010  
Millimeters: X.X= ±0.5 , X.XX=±0.25

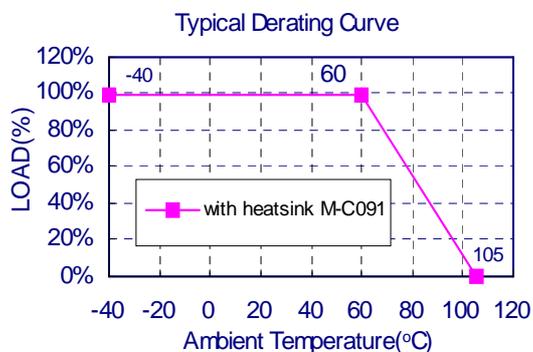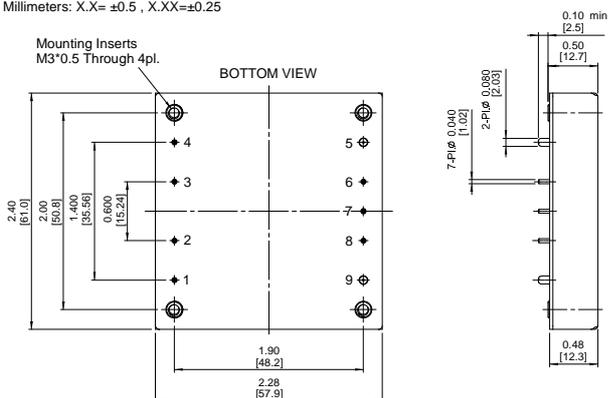

| Pin | Function |
|-----|----------|
| 1   | +Vin     |
| 2   | ON/OFF   |
| 3   | CASE     |
| 4   | -Vin     |
| 5   | -Vout    |
| 6   | -Sense   |
| 7   | Trim     |
| 8   | +Sense   |
| 9   | +Vout    |

## REMOTE ON/OFF CONTROL

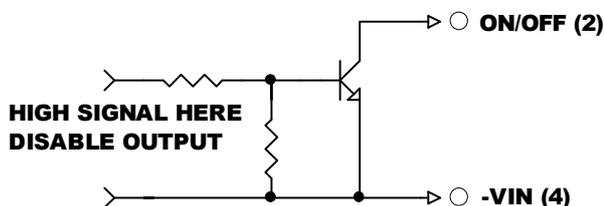

## EXTERNAL OUTPUT TRIM

