

**SERIES:** ETSA 40W UD | **DESCRIPTION:** AC-DC POWER SUPPLY

**FEATURES**


- 40 W power
- compact size
- universal input (90~264 Vac)
- single regulated output from 12~48 V
- over voltage and short circuit protection
- UL/cUL, GS safety approvals
- level V efficiency
- custom designs available



MODEL	output voltage	output current	output power	ripple and noise <sup>1</sup>	efficiency level
	(Vdc)	max (A)	max (W)	max (mVp-p)	
ETSA120330UD	12	3.3	40	240	V
ETSA190210UD	19	2.1	40	240	V
ETSA200200UD	20	2	40	240	V
ETSA240170UD	24	1.7	40	240	V
ETSA480085UD	48	0.85	40	240	V

Notes: 1. At full load, 100 ~ 240 Vac input, 20 MHz bandwidth oscilloscope, each output terminated with 10 µF aluminum electrolytic and 0.1 µF ceramic capacitors.

**PART NUMBER KEY**

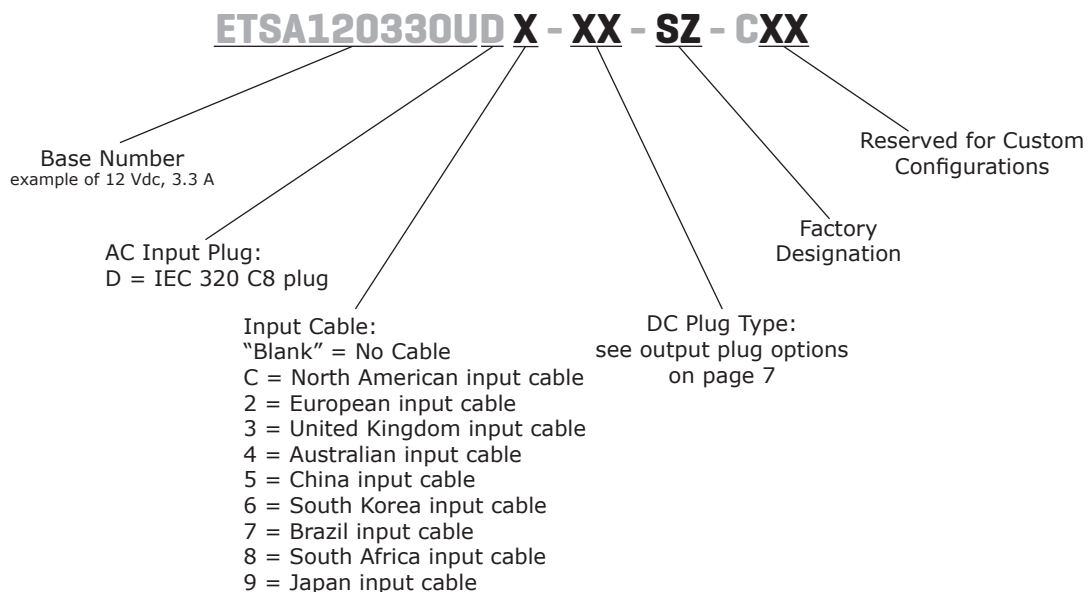

## INPUT

parameter	conditions/description	min	typ	max	units
voltage		85		264	Vac
frequency		47		63	Hz
current				1	RMS
leakage current	at 120 Vac			0.25	mA
no load power consumption				0.3	W

## OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation			±1		%
load regulation			±5		%

## PROTECTION

parameter	conditions/description	min	typ	max	units
short circuit protection	output shut down and auto restart				

## SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output at 10 mA for 1 minute			3,000 4,242	Vac Vac
isolation resistance	input to output at 500 Vdc	100			MΩ
safety approvals	UL 60950-1, EN 60950-1/IEC 60950-1, CSA C22.2 No. 60950-1				
EMI/EMC	FCC CFR 47 Part 15, EN 55022, EN 61000-3, EN 55024 (EN 61204-3), EN 61000-4, CE				
RoHS	2011/65/EU				

## ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature		0		40	°C
storage temperature		-10		70	°C
operating humidity		20		80	%
storage humidity		10		90	%

## MECHANICAL


parameter	conditions/description	min	typ	max	units
dimensions	2.972 x 1.882 x 1.110 (75.5 x 47.8 x 28.2 mm)				inch
input plug	IEC320 / C8				

## MECHANICAL DRAWING

units: mm  
tolerance: ±1mm

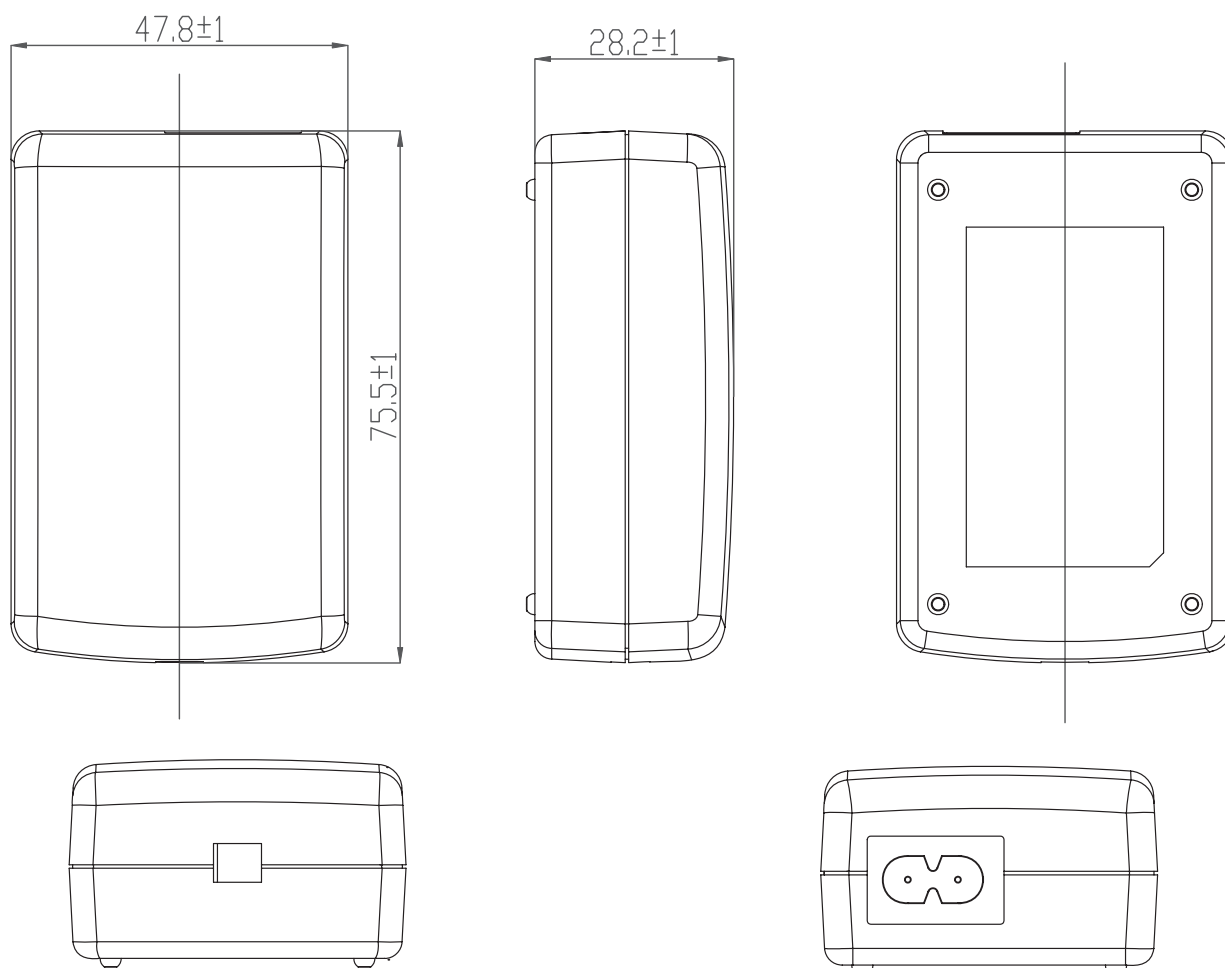

## DC CORD

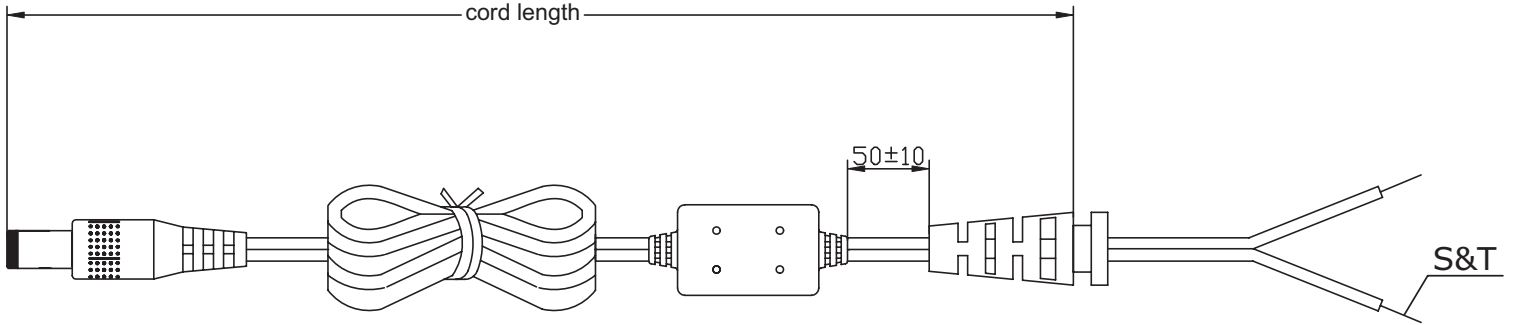


MODEL	CABLE GAUGE	CABLE LENGTH
ETSA120330UD	18 AWG	1,530 ±100
ETSA190210UD	20 AWG	1,830 +150/-0
ETSA200200UD	20 AWG	1,830 +150/-0
ETSA240170UD	20 AWG	1,830 +150/-0
ETSA480085UD	22 AWG	1,830 ±100

## AC CORD


### NORTH AMERICAN INPUT CABLE

units: mm

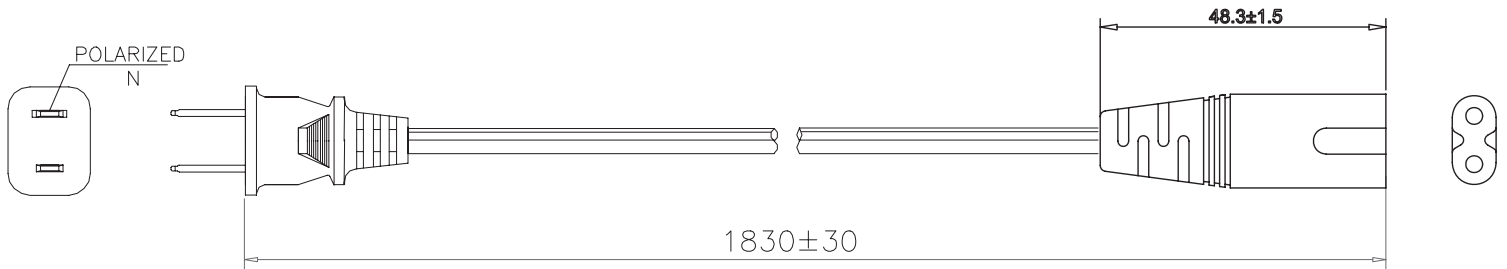

### EUROPEAN INPUT CABLE


units: mm

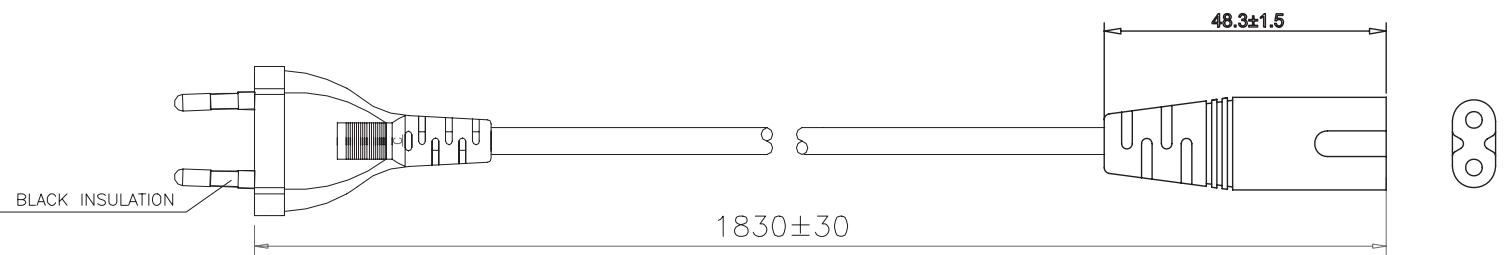

## AC CORD (CONTINUED)


### UNITED KINGDOM INPUT CABLE

units: mm

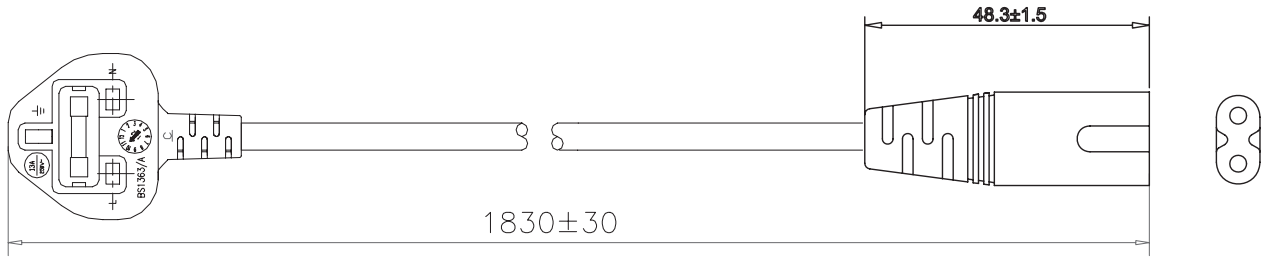


### AUSTRALIAN INPUT CABLE

units: mm

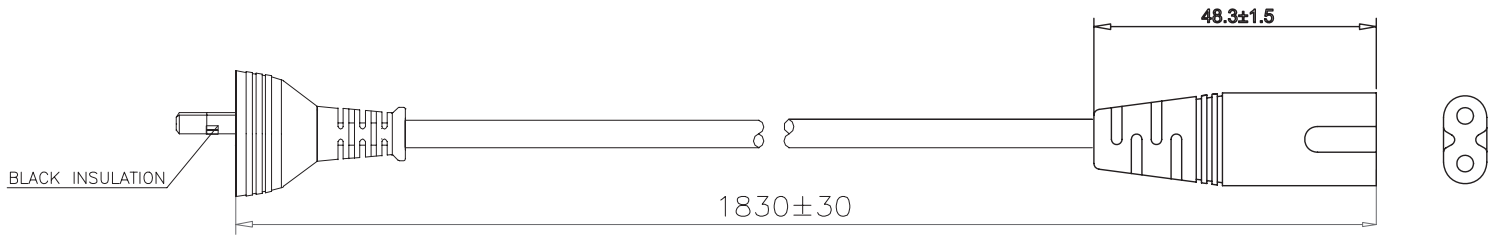


### CHINA INPUT CABLE

units: mm

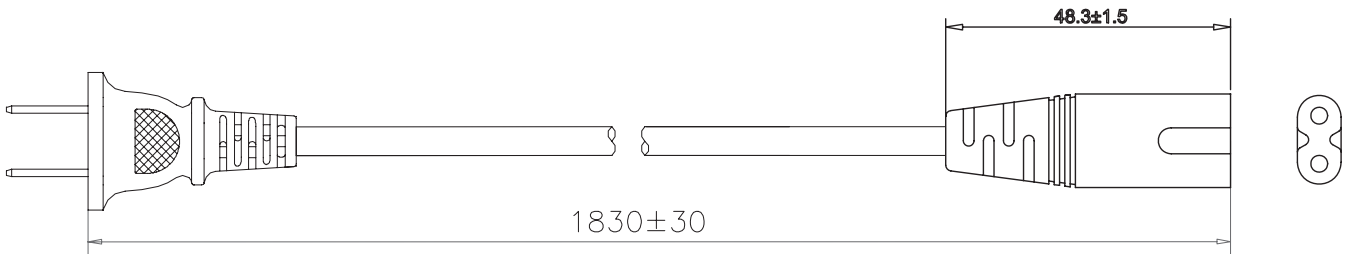

### SOUTH KOREA INPUT CABLE


units: mm

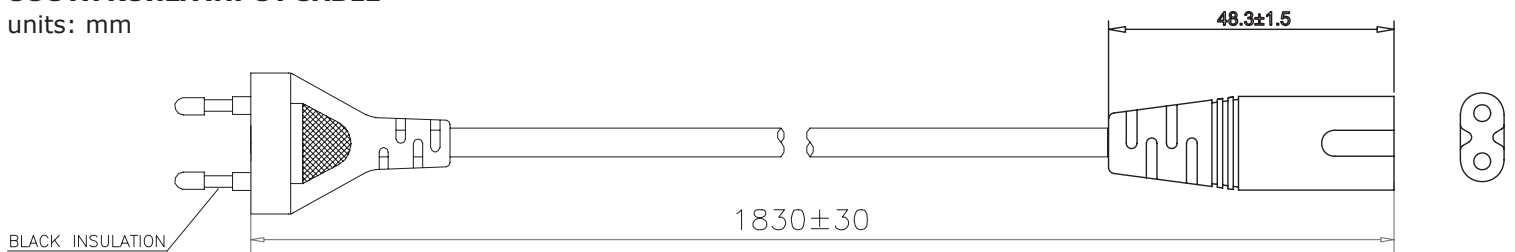

## AC CORD (CONTINUED)


### BRAZIL INPUT CABLE

units: mm

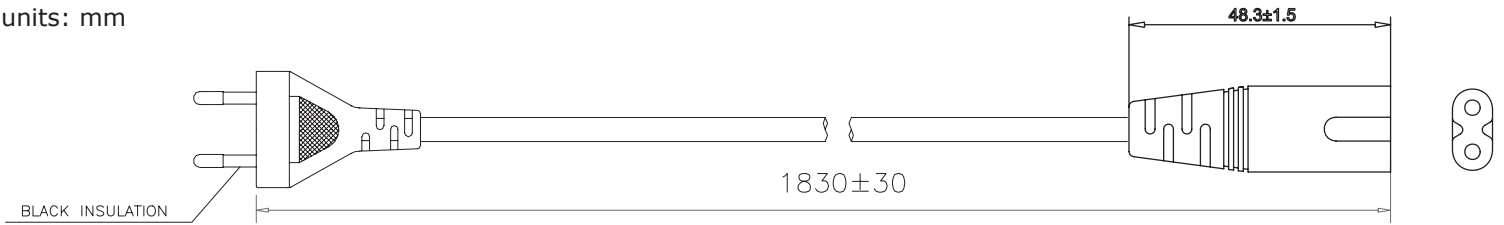


### SOUTH AFRICA INPUT CABLE

units: mm

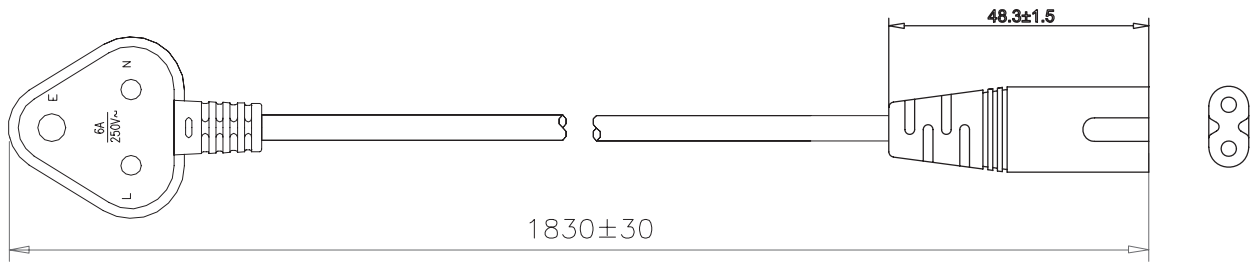


### JAPAN INPUT CABLE

units: mm

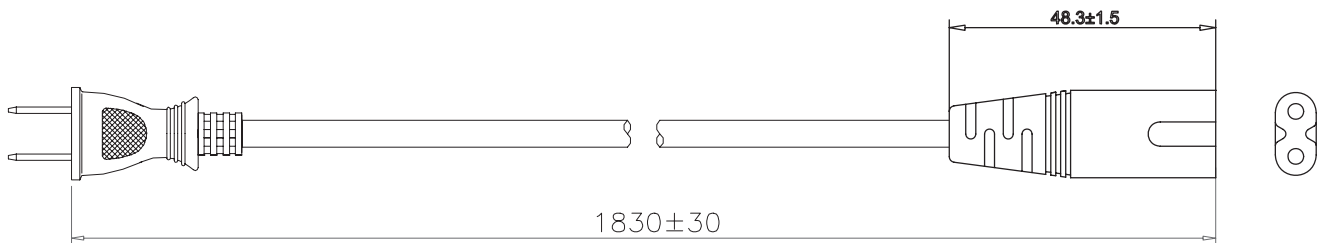


## OUTPUT PLUG OPTIONS

### 3.5 mm Phono Plug

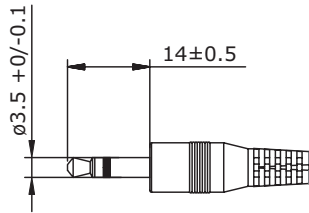


P1




P1R

\*Tip positive

### Standard DC Plug

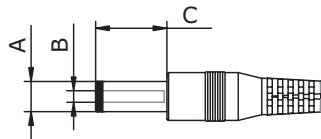


Standard PX



Right Angle PXR


	A	B	C	Unit
P5/P5R	5.5	2.1	9.5	mm
P6/P6R	5.5	2.5	9.5	mm
P7/P7R	3.5	1.35	9.5	mm
P8/P8R	3.8	1.35	9.5	mm
P9/P9R	3.8	1.05	9.5	mm

### Locking DC Plug

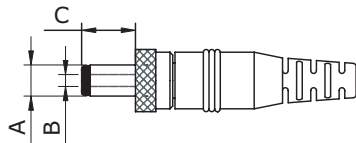


	A	B	C	Unit
P10	5.5	2.1	9.5	mm
P11	5.5	2.5	9.5	mm

### EIAJ Plugs




Standard PXX




Right Angle PXXR

	EIAJ	A	B	C	D	Unit
P12/P12R	EIAJ-1	2.35	0.7	9.5	NA	mm
P13/P13R	EIAJ-2	4.0	1.7	9.5	5.0	mm
P14/P14R	EIAJ-3	4.75	1.7	9.5	5.0	mm



### Stripped and Tinned

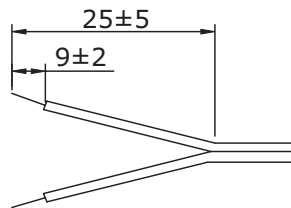

### DC PLUG TYPE

**PXX XX**

Plug Type:  
PXX = See above plug options  
ST = Stripped and Tinned

Plug Angle:  
"blank" = Straight  
R = Right Angle

Plug Polarity:  
P = Center Positive



N = Center Negative



\*Contact CUI for additional plug options

## REVISION HISTORY

rev.	description	date
1.0	initial release	05/18/2010
1.01	applied new spec template	08/02/2011
1.02	updated voltage	12/22/2011
1.03	updated P7/P7R B dimension	03/23/2012
1.04	updated safety and EMI/EMC data	05/15/2012
1.05	safety and EMI/EMC data updated, V-Infinity branding removed	08/15/2012
1.06	updated series/model numbers	11/20/2012
1.07	corrected dc cord lengths	01/16/2013
1.08	removed PSE	06/11/2013
1.09	added ac cord options	11/18/2014
1.10	updated datasheet	01/21/2015

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**<sup>®</sup>

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.