

### Features

- ◆ 2" x 1" metal package
- ◆ Ultra wide 4:1 input voltage range  
9–36, 18–75, 43–160 VDC
- ◆ EN 50155 approval for railway applications
- ◆ Thermal shock and vibration resistant according EN 61373
- ◆ High efficiency up to 92%
- ◆ No minimum load required
- ◆ Operating temperature range  
–40°C to +85°C
- ◆ Under voltage lock-out circuit
- ◆ Remote On/Off
- ◆ Output voltage adjustable
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty



The TEN 40WIR series is a family of high performance 40 Watt dc/dc converter modules featuring ultra wide 4:1 input voltage ranges in a 2" x 1" package with industry-standard footprint. Input voltages up to 160 VDC, excellent EMC characteristics and EN 50155 approval make this product the best choice for many demanding applications in railroad and transportation systems. Further standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. Low input current characteristics at minimal load make these converters also the ideal solution for battery-operated systems. Typical applications are in wireless networks, telecom/datacom, industry control systems and measurement equipments.

### Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 40-2410WIR	9 – 36 VDC (24 VDC nominal)	3.3 VDC	10'000 mA	90 %
TEN 40-2411WIR		5.0 VDC	8000 mA	91 %
TEN 40-2412WIR		12 VDC	3333 mA	91 %
TEN 40-2413WIR		15 VDC	2666 mA	91 %
TEN 40-2415WIR		24 VDC	1666 mA	91 %
TEN 40-2422WIR		±12 VDC	±1666 mA	90 %
TEN 40-2423WIR		±15 VDC	±1333 mA	90 %
TEN 40-4810WIR	18 – 75 VDC (48 VDC nominal)	3.3 VDC	10'000 mA	90 %
TEN 40-4811WIR		5.0 VDC	8000 mA	91 %
TEN 40-4812WIR		12 VDC	3333 mA	92 %
TEN 40-4813WIR		15 VDC	2666 mA	92 %
TEN 40-4815WIR		24 VDC	1666 mA	91 %
TEN 40-4822WIR		±12 VDC	±1666 mA	90 %
TEN 40-4823WIR		±15 VDC	±1333 mA	90 %
TEN 40-7210WIR	43 – 160 VDC (110 VDC nominal)	3.3 VDC	10'000 mA	88 %
TEN 40-7211WIR		5.0 VDC	8000 mA	89 %
TEN 40-7212WIR		12 VDC	3333 mA	90 %
TEN 40-7213WIR		15 VDC	2666 mA	90 %
TEN 40-7215WIR		24 VDC	1666 mA	90 %
TEN 40-7222WIR		±12 VDC	±1666 mA	89 %
TEN 40-7223WIR		±15 VDC	±1333 mA	89 %

### Input Specifications

Input current (no load)	24 Vin models: 15 mA typ. 48 Vin models: 10 mA typ. 110 Vin models: 6 mA typ.
Start-up voltage	24 Vin models: < 9.0 VDC 48 Vin models: < 18 VDC 110 Vin models: < 43 VDC
Under voltage shut down (lock-out circuit)	24 Vin models: 8.0 VDC typ. 48 Vin models: 16 VDC typ. 110 Vin models: 40 VDC typ.
Surge voltage (1 sec.)	24 Vin models: 50 V max. 48 Vin models: 100 V max. 110 Vin models: 170 V max.
Reflected ripple current	20 mA <sub>p-p</sub> typ.
Conducted noise	EN 55022 class A with external components see: <a href="#">application note</a>
EMC immunity	EN 50121-3-2 EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV perf. criteria A 24 & 48 Vin models: Nippon chemi-con KY 220 µF, 100 V, ESR 48 mOhm 110 Vin models: Ruby-con BXF 68 µF, 200 V, 3pcs in parallel. EN 61000-4-6, 10 Vrms, perf. criteria A
	– ESD (electrostatic discharge)
	– Radiated immunity
	– Fast transient / surge (with external input capacitor)
	– Conducted immunity

### Output Specifications

Voltage set accuracy	±1 %
Voltage adjustment range (single output models only)	15 & 24 VDC models: +20 %, -10 % other models: ±10 %
Regulation	– Input variation Vin min. to Vin max. 0.2 % max. – Load variation 0 – 100 % single output models: 0.5 % max. dual output models: 1 % max. (balanced load) 5 % max. (Load cross variation 25 % / 100 %)
Minimum load	not required
Temperature coefficient	±0.02 %/K
Ripple and noise (20 MHz bandwidth, measured with 1 µF/ 50 V MLCC)	3.3 & 5.0 VDC models: 75 mV <sub>p-p</sub> max. 24 VDC models: 150 mV <sub>p-p</sub> max. other models: 100 mV <sub>p-p</sub> max.
Start up time	– Power On 60 ms typ. – Remote On 60 ms typ.
Transient response (25% load step change)	250 µs typ.
Short circuit protection	indefinite (automatic recovery)
Over load protection	150 % of I <sub>out</sub> max. typ.
Over voltage protection (only single output models)	3.3 VDC models: 3.9 V 5 VDC models: 6.2 V 12 VDC models: 15 V 15 VDC models: 20 V 24 VDC models: 31 V

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### Output Specifications


Capacitive load (max. values)	3.3 VDC models:	26'600 $\mu$ F
	5.0 VDC models:	20'000 $\mu$ F
	12 VDC models:	3900 $\mu$ F
	15 VDC models:	2600 $\mu$ F
	24 VDC models:	1300 $\mu$ F
	$\pm$ 12 VDC models:	2600 $\mu$ F (each output)
	$\pm$ 15 VDC models:	1600 $\mu$ F (each output)

### General Specifications


Temperature ranges	- Operating	-40°C to +85°C (with derating)
	- Casing temperature	+105°C max.
	- Storage	-55°C to +125°C
Power derating	- Natural convection	2.5 %/K above +60°C
	- Natural convection with heat sink (optional)	2.8 %/K above +65°C
Thermal impedance	- Natural convection	10.8 K/W
	- Natural convection with heat sink (optional)	10.3 K/W
Humidity (non condensing)		5 - 95 % rel. H
Isolation voltage (60 sec.)	- Input / Output	1600 VDC
Isolation resistance	- Input / Output	>10'000 M Ohm
Isolation capacitance	- Input / Output	1'500 pF max.
Switching frequency		250 kHz typ. (pulse width modulation PWM)
Thermal shock, mechanical shock & vibration		EN 61373, MIL-STD-810F
	- Test conditions	<a href="http://www.tracopower.com/products/mil810.pdf">www.tracopower.com/products/mil810.pdf</a>
Safety standards		UL/cUL 60950-1, IEC/EN 60950-1, EN 50155
Safety approvals	- UL/cUL (entry pending)	<a href="http://www.ul.com">www.ul.com</a> -> certifications -> File e188913
Remote On/Off	- On:	3.0 ... 12 VDC or open circuit
	- Off:	0 ... 1.2 VDC or short circuit pin 3 and pin 2
	- Off idle current:	3.0 mA
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		900'000 h
Environmental compliance	- Reach	<a href="http://www.tracopower.com/products/reach-declaration.pdf">www.tracopower.com/products/reach-declaration.pdf</a>
	- RoHS	RoHS directive 2011/65/EU

### Output Voltage Adjustment (for single output models only)

#### Trim up



#### Trim down



Nominal output voltage at open Trim input  
Ru, Rd for adjustment to be advised


**Application note:** [www.tracopower.com/products/ten40wir-application.pdf](http://www.tracopower.com/products/ten40wir-application.pdf)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Casing material	copper
Baseplate material	non conductive FR4
Potting material	silicone (UL94V-0 rated)
Weight	21.5 g (0.76oz)
Soldering temperature	max. +265°C / 10 sec.

**Outline Dimensions**




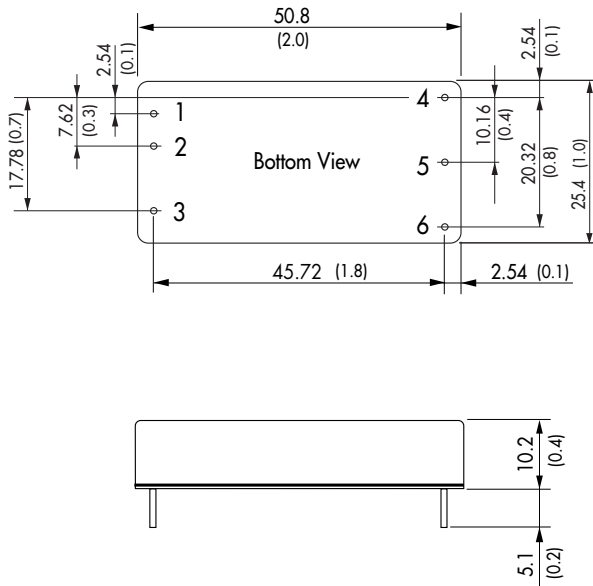


Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	
4	+Vout	+Vout
5	-Vout	Common
6	TRIM	-Vout

Dimensions in [mm], ( ) = Inch  
 Pin diameter: 1.0 ±0.1 (0.04 ±0.004)  
 Pin pitch tolerances: ±0.25 (±0.01)  
 Case tolerances: ±0.5 (±0.02)

**Heat-Sink (Option)**

**Order code:** TEN-HS1  
 (cont.: heat-sink, thermal pad, 2 clamps)  
**Material:** Aluminum  
**Finish:** Anodic treatment (black)  
**Weight:** 17 g (0.60oz) without converter  
 Thermal impedance after assembling: 10.3 K/W

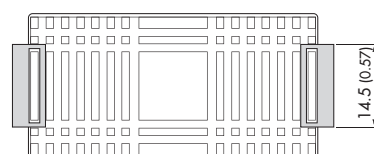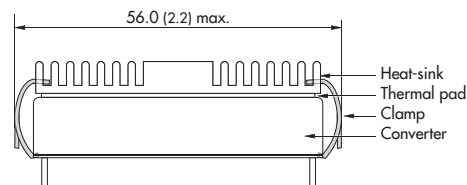

**Note:**  
 Before attaching the heatsink, the product label on converter has to be removed for optimal performance.  
 For volume orders we can supply the converters with heatsink already mounted. Please contact us for a relative quotation.

Dimensions in mm, ( ) = Inch

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)